
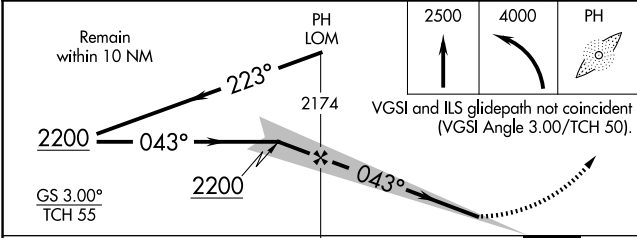


|                           |                        |                                                            |
|---------------------------|------------------------|------------------------------------------------------------|
| LOC I-PHN<br><b>110.9</b> | APP CRS<br><b>043°</b> | Rwy Idg<br>TDZE<br>Apt Elev<br><b>5104<br/>647<br/>650</b> |
|---------------------------|------------------------|------------------------------------------------------------|


ILS or LOC RWY 4  
ST CLAIR COUNTY INTL (PHN)

|                                                                                                                                                                                                                                                                                                                                                                    |                     |                                                                                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>ADF required.</b> When local altimeter setting not received, use Troy altimeter setting and increase all DA 95 feet and all MDA 100 feet; increase S-LOC 4 Cats C and D and Circling Cats C and D visibility ¼ mile. For inop MALSR when using Troy altimeter setting, increase S-ILS 4 all Cats visibility to ¾ mile. Night landing: Rwy 10, 22, 28 NA.</p> | <p><b>MALSR</b></p> | <p><b>MISSED APPROACH:</b> Climb to 2500 then climbing left turn to 4000 direct PHURN LOM and hold, continue climb-in-hold to 4000.</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------|

|                          |                                            |                                |
|--------------------------|--------------------------------------------|--------------------------------|
| AWOS-3<br><b>118.375</b> | SELFDRIDGE APP CON ★<br><b>119.6 391.9</b> | UNICOM<br><b>123.05 (CTAF)</b> |
|--------------------------|--------------------------------------------|--------------------------------|

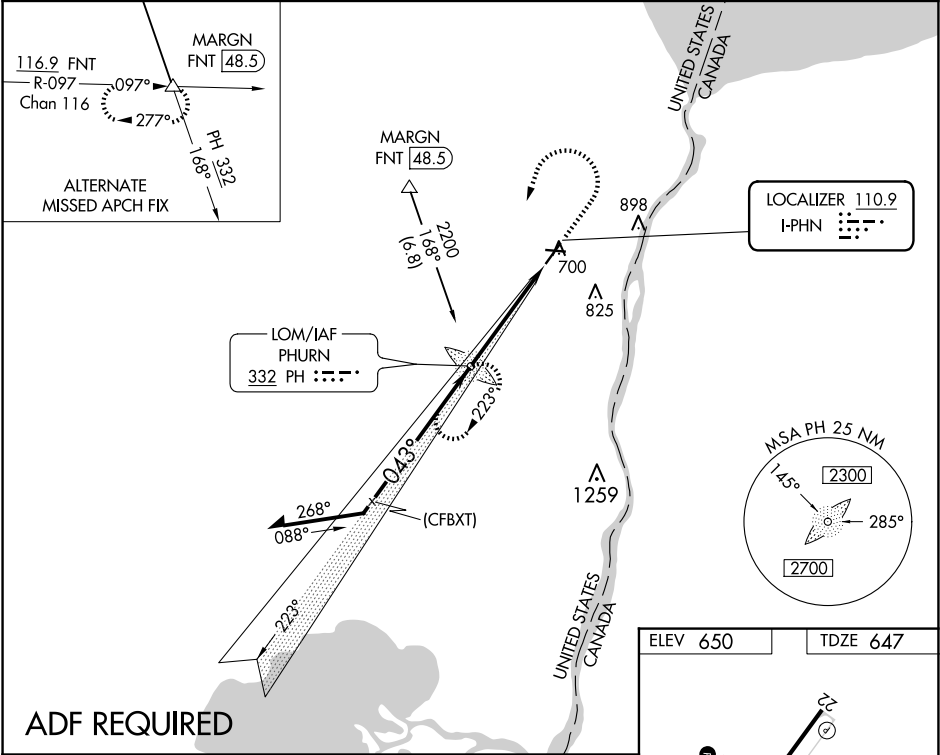

| CATEGORY          | A                  | B                    | C | D |
|-------------------|--------------------|----------------------|---|---|
| S-ILS 4           | 847-½ 200 (200-½)  |                      |   |   |
| S-LOC 4           | 1100-½ 453 (500-½) | 1100-¾ 453 (500-¾)   |   |   |
| <b>C</b> CIRCLING | 1160-1 510 (600-1) | 1260-1¼ 610 (700-1¼) |   |   |

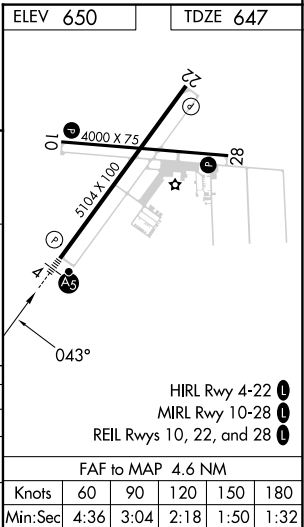

| Knots   | 60   | 90   | 120  | 150  | 180  |
|---------|------|------|------|------|------|
| Min:Sec | 4:36 | 3:04 | 2:18 | 1:50 | 1:32 |