

WAAS CH 82334 W09A	APP CRS 085°	Rwy Ldg 4005 TDZE 28 Apt Elev 28
--	------------------------	---

RNAV (GPS) RWY 9
ORMOND BEACH MUNI (OMN)

▼ Rwy 9 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use DAB altimeter setting: increase LPV DA to 332 feet; increase LNAV/VNAV DA to 337 feet; increase all MDAs 20 feet. Baro-VNAV and VDP NA when using DAB altimeter setting.


MISSED APPROACH: Climb to 600 then climbing left turn to 2800 direct ARSUF and hold, continue climb-in-hold to 2800.

ATIS
118.475

DAYTONA APP CON
125.8 269.075

ORMOND BEACH TOWER★
119.075 (CTAF) L

GND CON
121.625

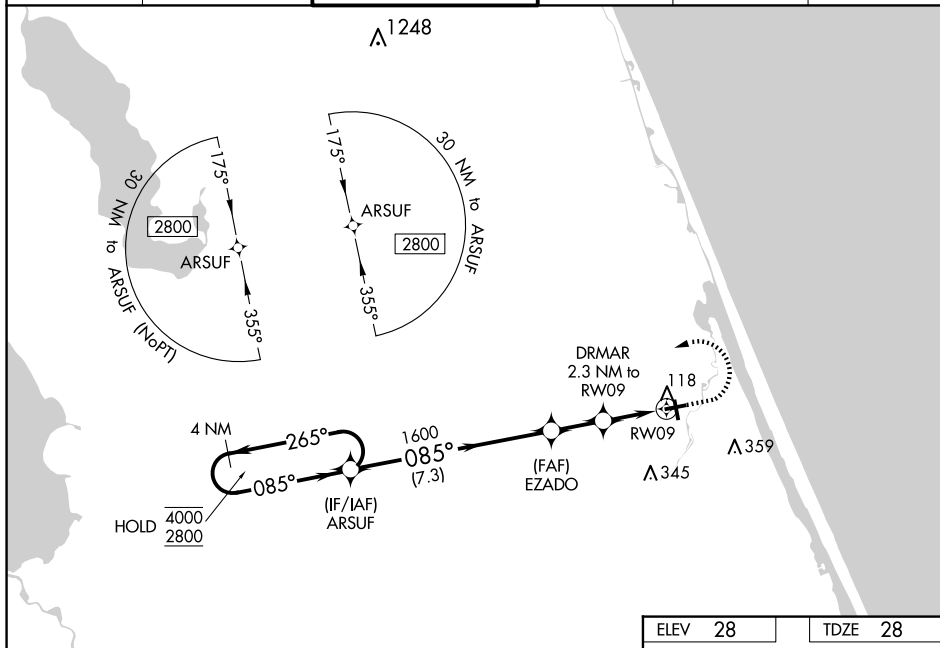CLNC DEL
121.625UNICOM
123.05

VGSI and RNAV glidepath not coincident (VGSI Angle 3.40/TCH 48).	600	2800	ARSUF
---	-----	------	-------

4 NM
Holding Pattern

ADCLIF

EZADO

600

280

ARSUF

4000

4000
3800

GP 3.40°

TCH 60

5 |

2	
---	--


00 |

↓

.....

■■■■

CATEGORY		A	B	C	D
LPV	DA	313-7/8	285 (300-7/8)		NA
LNAV/ VNAV	DA	318-7/8	290 (300-7/8)		NA
LNAV	MDA	420-1	392 (400-1)	420-1 1/8 392 (400-1 1/8)	NA
 CIRCLING		500-1	472 (500-1)	740-2 712 (800-2)	NA



REIL Rwys 9, 17, 27 and 35 **L**
MIRL Rwys 9-27 and 17-35 **L**

SE-3, 12 JUN 2025 to 10 JUL 2025