

LOC I-UCY <u>109.7</u>	APP CRS 006°	Rwy Idg 6503 TDZE 346 Apt Elev 346
----------------------------------	------------------------	---

ILS or LOC RWY 1
EVERETT-STEWART RGNL (UCY)

▼ ADF required. When local altimeter setting not received, use Dyersburg altimeter setting and increase all DA 72 feet and all MDA 80 feet, increase S-LOC 1 Cat C/D visibility to 1 3/4 mile, Circling Cat C visibility to 1 3/4 mile and Circling Cat D visibility to 2 1/2 mile. Inop table does not apply to S-ILS 1. For inop ODALS, increase S-LOC 1 Cat C/D visibility to 1 3/4 mile. For inop ODALS when using Dyersburg altimeter setting, increase S-ILS 1 all Cats visibility to 3/4 mile and S-LOC 1 Cat D visibility to 1 3/4 mile.

ODALS



MISSED APPROACH:
Climb to 1300 then
climbing right turn to
2500 direct OBION
LOM and hold.

AWOS-3


135.325

MEMPHIS CENTER


133.65 292.15

UNICOM

122.7 (CTAF) **L**

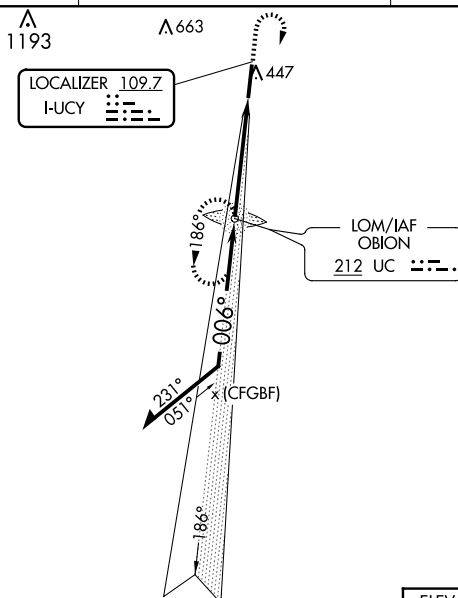

ADF and RADAR REQUIRED

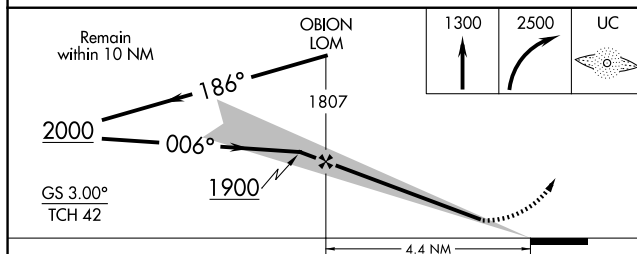

CATEGORY	A	B	C	D
S-ILS 1	546- ³ / ₄ 200 (200- ³ / ₄)			
S-LOC 1	820- ³ / ₄ 474 (500- ³ / ₄)		820-1 ¹ / ₄ 474 (500-1 ¹ / ₄)	
C CIRCLING	820-1	474 (500-1)	820-1 ¹ / ₂ 474 (500-1 ¹ / ₂)	1020-2 ¹ / ₄ 674 (700-2 ¹ / ₄)

ELEV 346 TDZE 346

MIRL Rwy 1-19
REIL Rws 1 and 19

61
6503 X 100
0.6% UP
424
006°
FAF to MAAP 4.4 NM

Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28