

MID-CAROLINA RGNL (RUQ)
SALISBURY, NORTH CAROLINA

KNIGHTS THREE DEPARTURE


TOP ALTITUDE:
3000

RADAR and DME required.

TAKEOFF MINIMUMS

Rwy 2: Standard.

Rwy 20: 400-2¾ or standard with minimum climb of 205' per NM to 1300, or alternatively, with standard takeoff minimums and a normal 200' per NM climb gradient, takeoff must occur no later than 1200' prior to DER.

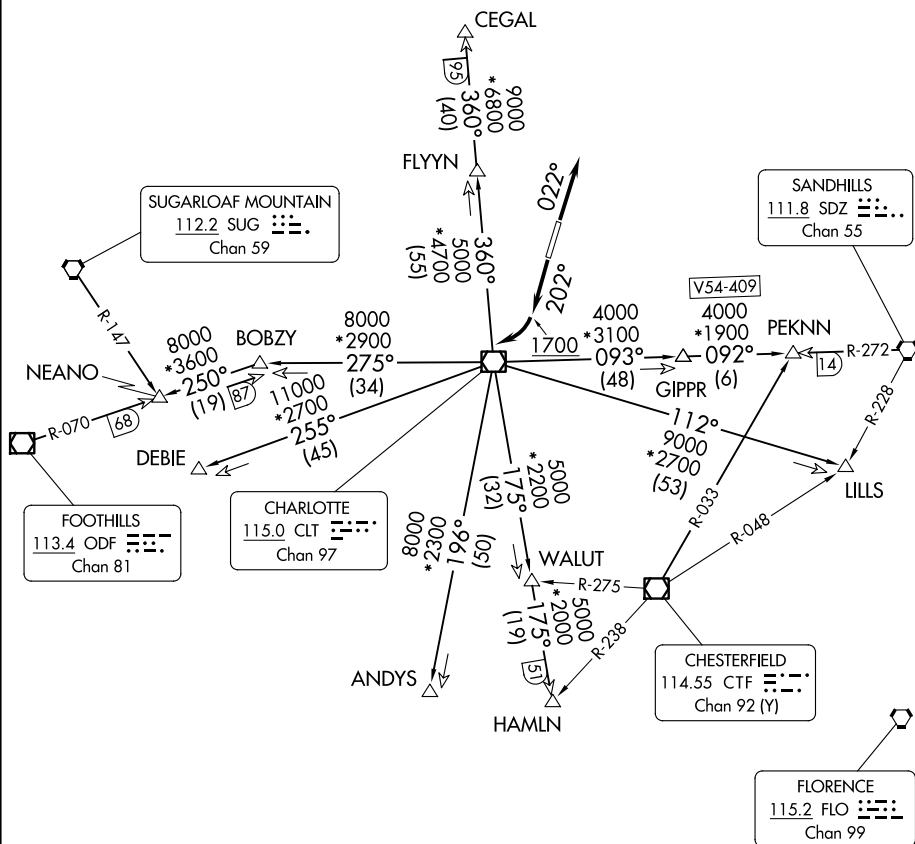

NOTE: For propeller aircraft only.

NOTE: Turboprops: Operate in a manner that will result in best forward speed and climb rate.

NOTE: Transponder code will be issued via Charlotte clearance delivery.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

KNIGHTS THREE DEPARTURE

(KNI3.KNI) 21MAR24

SALISBURY, NORTH CAROLINA
MID-CAROLINA RGNL (RUQ)

SE-2, 12 JUN 2025 to 10 JUL 2025