
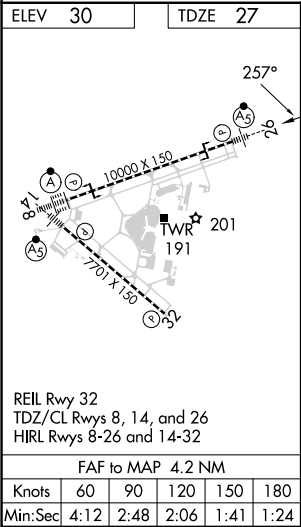


LOC I-PEK	APP CRS	Rwy ldg	10000
110.3	257°	TDZE	27
		Apt Elev	30

ILS Y or LOC Y RWY 26

JACKSONVILLE INTL (JAX)

ADF required. RADAR required for procedure entry.			MALSR 	MISSED APPROACH: Climb to 3000 direct DINNS LOM and hold, continue climb-in-hold to 3000.	
	For inop ALS, ZETRI Fix Minimums: increase S-LOC 26 Cats C/D visibility to RVR 5500.				
D-ATIS	JACKSONVILLE APP CON	JACKSONVILLE TOWER	GND CON	CLNC DEL	CPDLC
125.85	119.0 269.9	118.3 317.7	121.9 348.6	119.5 290.275	

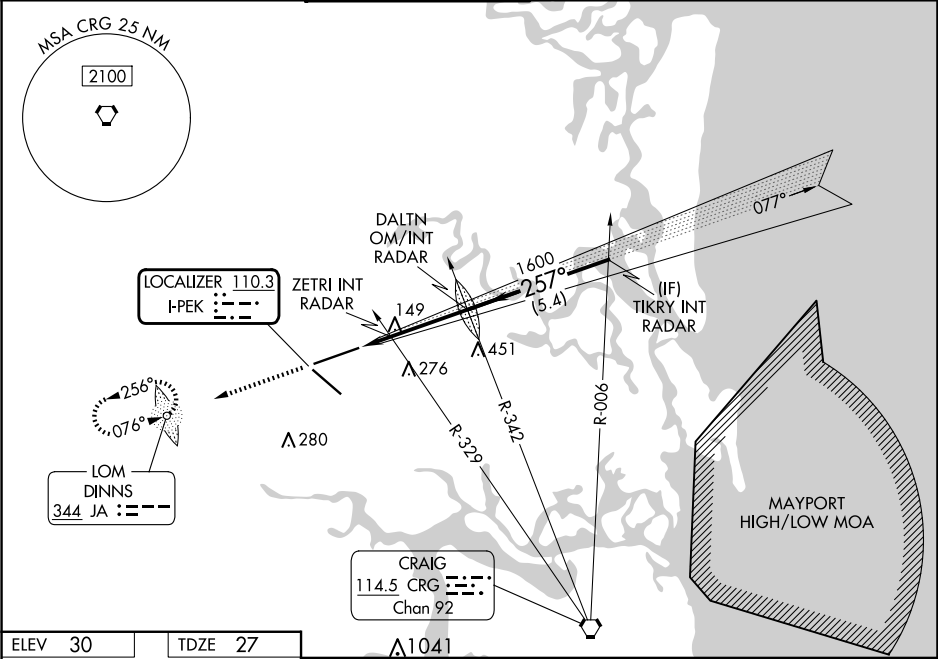

3000 DINNS		VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70).			
ZETRI INT RADAR		DALTN OM/INT RADAR		TIKRY INT RADAR	
1402		1600		2000	
480		1600		GS 3.00°	
1.2 NM		3 NM		5.4 NM	
CATEGORY	A	B	C	D	
S-ILS 26	227/18 200 (200-½)				
S-LOC 26	480/24	453 (500-½)	480/45	453 (500-¾)	
CIRCLING	520-1	490 (500-1)	580-1½	580-2	
			550 (600-1½)	550 (600-2)	
ZETRI FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)					
S-LOC 26	400/24	373 (400-½)	400/35	373 (400-¾)	
CIRCLING	520-1	490 (500-1)	580-1½	580-2	
			550 (600-1½)	550 (600-2)	