

APP CRS
257°

Rwy Idg
TDZE
27

10000
Apt Elev
30

RNAV (RNP) Y RWY 26

JACKSONVILLE INTL (JAX)



RNP AR APCH-GPS.

For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.

MALSR

MISSED APPROACH: Climb to 2000 on track 257° to UDAQI and hold.

D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6	CLNC DEL 119.5 290.275	CPDLC
------------------	-------------------------------------	-----------------------------------	------------------------	---------------------------	-------

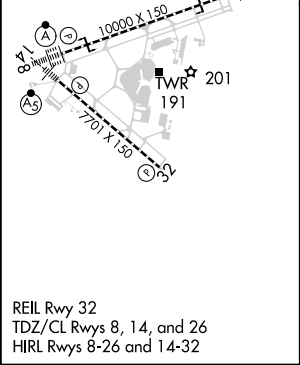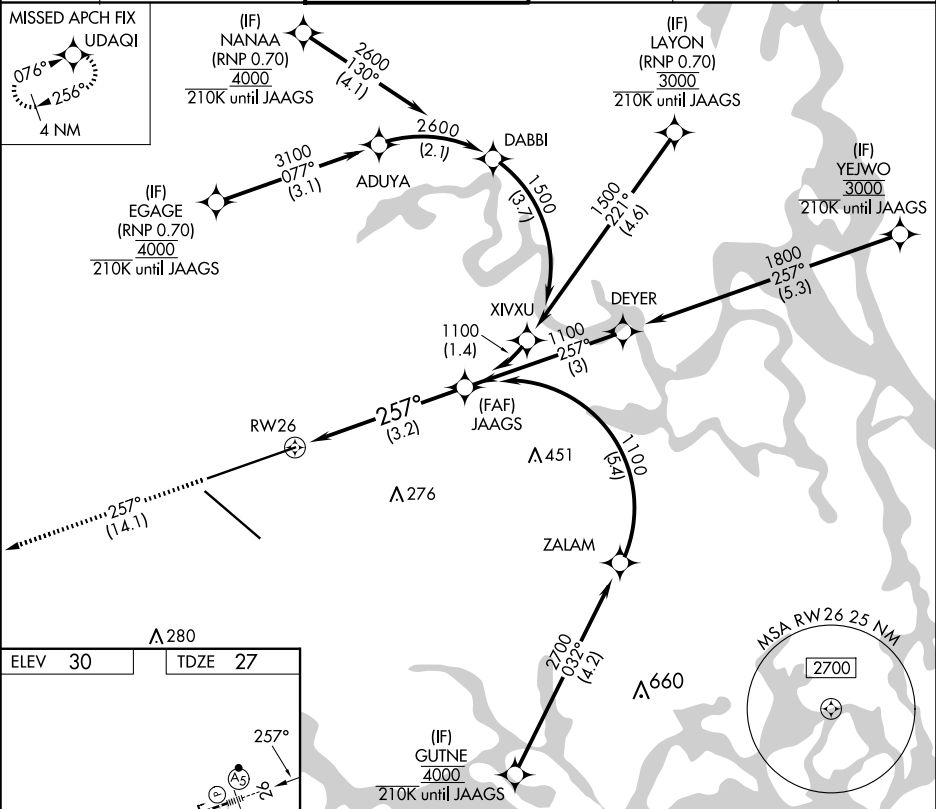

2000

UDAQI

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

See planview for multiple IF locations.

RWY 26

JAAGS 1100

257°

1100

GP 3.00°

TCH 49

3.2 NM

CATEGORY	A	B	C	D
RNP 0.30 DA	419/35 392 (400-5%)			

AUTHORIZATION REQUIRED