


|                                        |                        |                             |                                       |
|----------------------------------------|------------------------|-----------------------------|---------------------------------------|
| WAAS<br>CH <b>93536</b><br><b>W09A</b> | APP CRS<br><b>094°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>4004</b><br><b>38</b><br><b>38</b> |
|----------------------------------------|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) RWY 9

WALLACE-PENDER (ACZ)

|                                                                                                                                                                                                                                              |                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| RNP APCH - GPS.                                                                                                                                                                                                                              | MISSED APPROACH: Climb to 2000 direct EJABI and hold. |
| <div><div>▼</div><div>NA</div></div> <div>Rwy 9 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA.<br/>When local altimeter not received, use Kenansville altimeter setting.<br/>Straight-in and Circling Rwy 9 NA at night.</div> |                                                       |

|                          |                                               |                                 |
|--------------------------|-----------------------------------------------|---------------------------------|
| AWOS-3P<br><b>121.07</b> | WILMINGTON APP CON ★<br><b>135.75 317.425</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|-----------------------------------------------|---------------------------------|

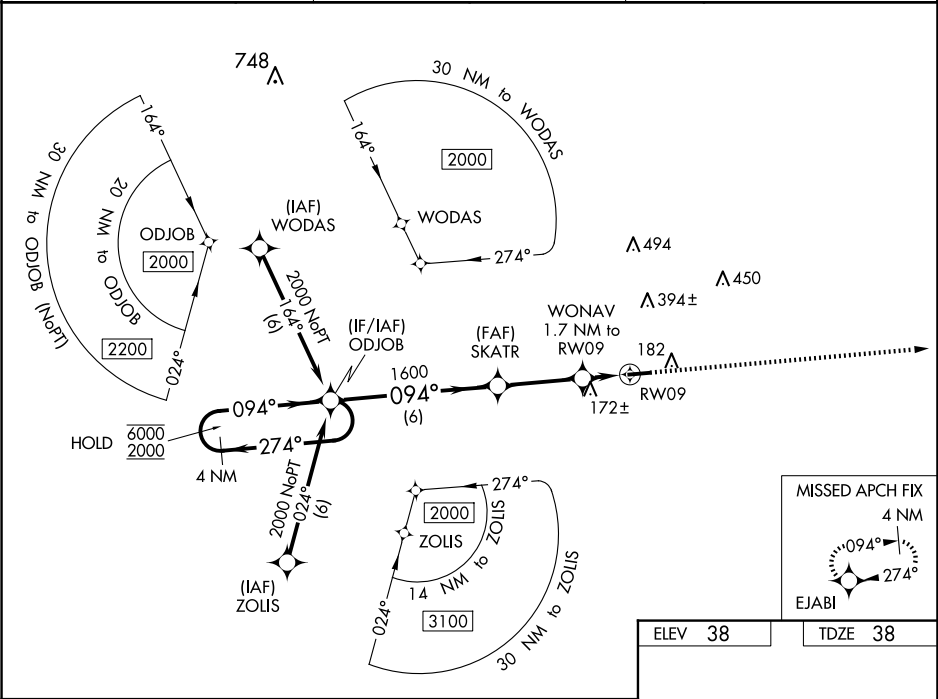

|                      |                   |                                                                  |                     |        |                      |
|----------------------|-------------------|------------------------------------------------------------------|---------------------|--------|----------------------|
| 4 NM Holding Pattern |                   | VGSI and RNAV glidepath not coincident (VGSI Angle 3.13/TCH 40). |                     | 2000   | EJABI                |
| GP 3.00° TCH 51      |                   | 620                                                              |                     | 1600   | WONAV 1.7 NM to RW09 |
| 6000 ← 274°          |                   | 094°                                                             |                     | 1600   | SKATR                |
| 2000 → 094°          |                   | 094°                                                             |                     | 1600   | WONAV 1.7 NM to RW09 |
| 6 NM                 |                   | 3.1 NM                                                           |                     | 1.7 NM | RW09                 |
| CATEGORY             | A                 | B                                                                | C                   | D      |                      |
| LPV DA               | 401-1             |                                                                  | 363 (400-1)         |        |                      |
| LNAV/VNAV DA         | 538-1½            |                                                                  | 500 (500-1½)        |        |                      |
| LNAV MDA             | 500-1 462 (500-1) |                                                                  | 500-1¾ 462 (500-1¾) |        |                      |
| CIRCLING             | 620-1 582 (600-1) |                                                                  | 820-2¼ 782 (800-2¼) |        |                      |

