

25051

AL-5596 (FAA)

EASTON/NEWNAM FLD (ESN)

EASTON, MARYLAND


LINSE TWO DEPARTURE (RNAV)

POTOMAC DEP CON
133.75 254.35
ATIS
124.475
CLNC DEL
119.075
GND CON
119.075
EASTON TOWER ★
118.525

RNAV 1 - DME/DME/IRU or GPS.

RADAR required.

TOP ALTITUDE:
16000

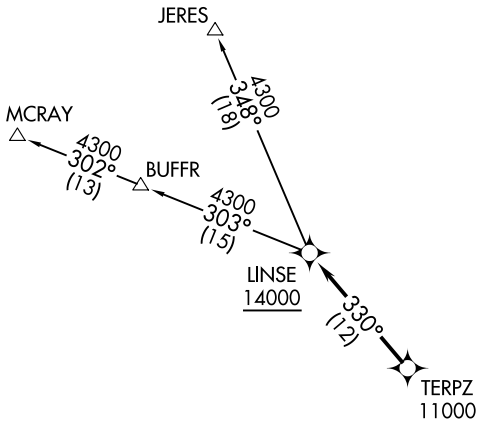

NOTE: Jet aircraft only.

TAKEOFF MINIMUMS:

Rwys 4, 15, 33: Standard.

Rwy 22: 300-2 or standard with minimum climb of 210'/NM to 400.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

Climb on assigned heading for RADAR vectors to cross TERPZ at or above 11 000, thence....

...then on track 330° to cross LINSE at or above 14000. Then on assigned transition. Maintain 16000, expect filed altitude 10 minutes after departure.

JERES TRANSITION (LINSE2.JERES)

MCRAY TRANSITION (LINSE2.MCRAY)

LINSE TWO DEPARTURE (RNAV)

(LINSE2.LINSE) 20FEB25

EASTON, MARYLAND

EASTON/NEWNAM FLD (ESN)

NE-3, 12 JUN 2025 to 10 JUL 2025