

|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>86905</b><br><b>W04A</b> | APP CRS<br><b>040°</b> | Rwy Idg <b>4775</b><br>TDZE <b>58</b><br>Apt Elev <b>72</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|

RNAV (GPS) RWY 4

EASTON/NEWNAM FLD (ESN)

RNP APCH - GPS.


▼

⚠

When local altimeter setting not received, use Cambridge altimeter setting; increase LPV DA to 303 feet, LNAV/VNAV DA to 670 feet and visibility ½ SM; increase all MDAs 60 feet and visibility LNAV Cat C/D and Circling Cat C ½ SM, and Circling Cat D ¼ SM. VDP and Baro-VNAV NA when using Cambridge altimeter setting. Circling Rwy 15, 33 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH:  
Climb to 700 then climbing right turn to 2000 direct ORETE and hold.

|                        |                                         |                                                  |                           |                            |
|------------------------|-----------------------------------------|--------------------------------------------------|---------------------------|----------------------------|
| ATIS<br><b>124.475</b> | POTOMAC APP CON<br><b>133.75 254.35</b> | EASTON TOWER ★<br><b>118.525</b> (CTAF) <b>0</b> | GND CON<br><b>119.075</b> | CLNC DEL<br><b>119.075</b> |
|------------------------|-----------------------------------------|--------------------------------------------------|---------------------------|----------------------------|

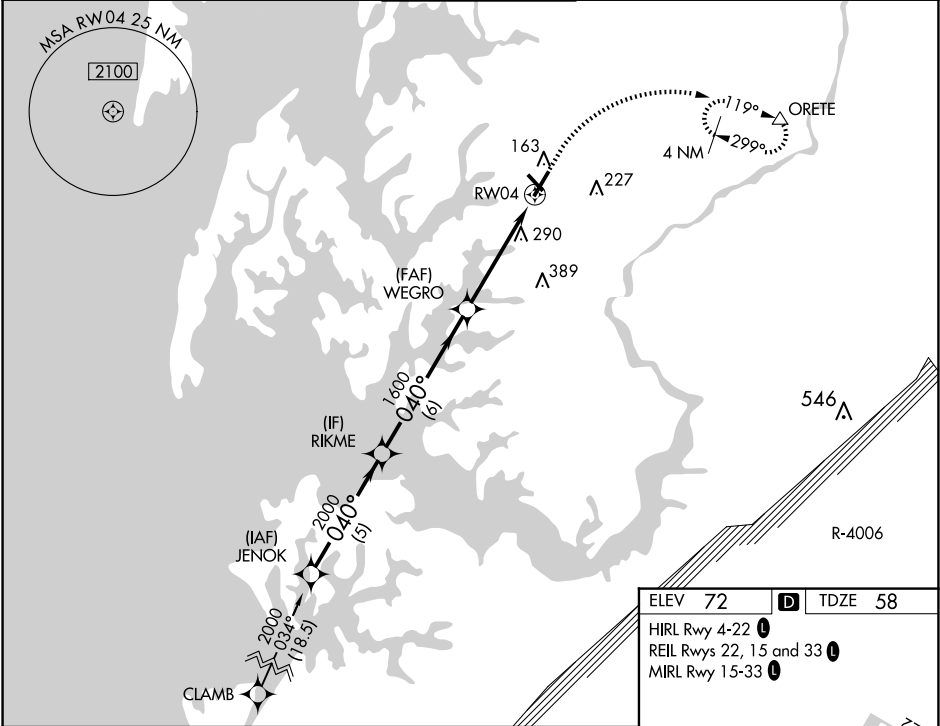

|                    |                      |  |                      |  |                        |  |                      |  |       |  |
|--------------------|----------------------|--|----------------------|--|------------------------|--|----------------------|--|-------|--|
|                    | JENOK                |  | RIKME                |  | WEGRO                  |  | RW04                 |  | ORETE |  |
|                    | 2000                 |  | 2000                 |  | 1600                   |  | 1600                 |  | 700   |  |
|                    | 040°                 |  | 040°                 |  | 040°                   |  | 040°                 |  | 040°  |  |
| GP 3.00°<br>TCH 44 |                      |  |                      |  |                        |  |                      |  |       |  |
|                    | 5 NM                 |  | 6 NM                 |  | 3.1 NM                 |  | 1.6                  |  |       |  |
| CATEGORY           | A                    |  | B                    |  | C                      |  | D                    |  |       |  |
| LPV DA             |                      |  | 258-¾                |  | 200 (200-¾)            |  |                      |  |       |  |
| LNAV/<br>VNAV DA   |                      |  | 625-1½               |  | 567 (600-1½)           |  |                      |  |       |  |
| LNAV MDA           | 600-1                |  | 542 (600-1)          |  | 600-1½                 |  | 542 (600-1½)         |  |       |  |
| ⬢ CIRCLING         | 600-1<br>528 (600-1) |  | 640-1<br>568 (600-1) |  | 640-1½<br>568 (600-1½) |  | 740-2<br>668 (700-2) |  |       |  |

