



VOR/DME MOX	APP CRS	Rwy Idg	4899
109.6	315°	TDZE	1130
Chan 33		Apt Elev	1136

VOR RWY 32

MORRIS MUNI/CHARLIE SCHMIDT FLD (MOX)

⚠ VDP NA when using BBB altimeter setting. When local altimeter setting not received, use BBB altimeter setting and increase all MDAs 60 feet and increase S-32 visibility Cat C ½ SM and Circling visibility Cat C ¼ SM; increase JEXIR fix minimums S-32 and Circling visibility Cat C ¼ SM.	MISSED APPROACH: Climb to 3000 then left turn direct MOX VOR/DME and hold.
---	---

AWOS-3PT 118.6	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF) 0
-------------------	-----------------------------------	--------------------------

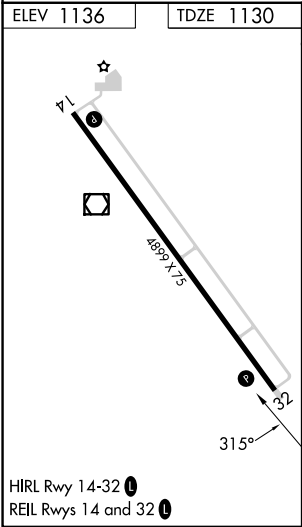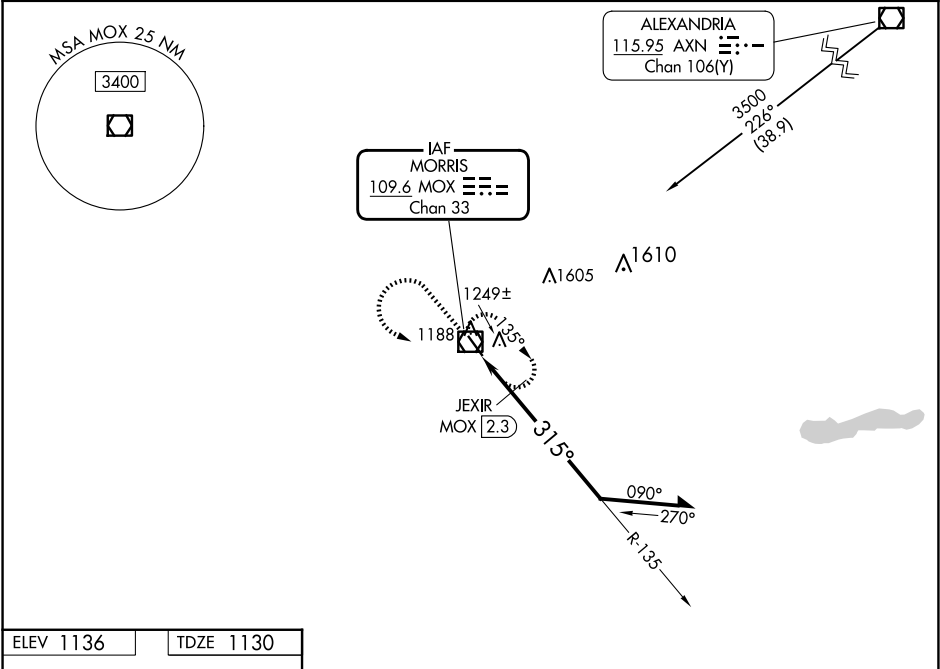

ELEV 1136	TDZE 1130
3000	MOX
*1760 when using Benson altimeter setting.	
MOX VOR/DME	
135°	
JEXIR MOX 2.3	
MOX 1.7	
315°	
1700*	
TCH 40	
1.1 NM	
0.6 NM	
Remain within 10 NM	
2800	
1700-1	
570 (600-1)	
1700-1 5/8	
570 (600-1 5/8)	
1860-2	
724 (800-2)	
JEXIR FIX MINIMUMS	
S-32	
1500-1	
370 (400-1)	
NA	
CIRCLING	
1560-1	
1600-1	
1860-2	
424 (500-1)	
464 (500-1)	
724 (800-2)	
NA	

VOR RWY 32