

VOR/DME DTL	APP CRS	Rwy Idg	5201
111.2	314°	TDZE	1372
Chan 49		Apt Elev	1396

VOR RWY 32

DETROIT LAKES/WETHING FLD (DTL)


NA

Circling NA to Rwy's 18 and 36. VDP NA with Park Rapids altimeter setting. When local altimeter setting not received, use Park Rapids altimeter setting and increase all MDA 100 feet and visibility Cat A ¼ SM, Cats C and D ½ SM and Circling Cats A and C ¼ SM, Cat D ½ SM. DUWIZ fix minimums: increase visibility Cats C and D ¼ SM. For inop ALS, increase S-32 Cats C and D visibility to 2½ SM. Inop table does not apply to S-32 Cats C and D when using Park Rapids altimeter setting.


MALSF

MISSED APPROACH: Climb to 2500 then climbing left turn to 3200 direct DTL VOR/DME and hold, continue climb-in-hold 3200.

AWOS-3PT 119.075	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF)
---------------------	-----------------------------------	------------------------

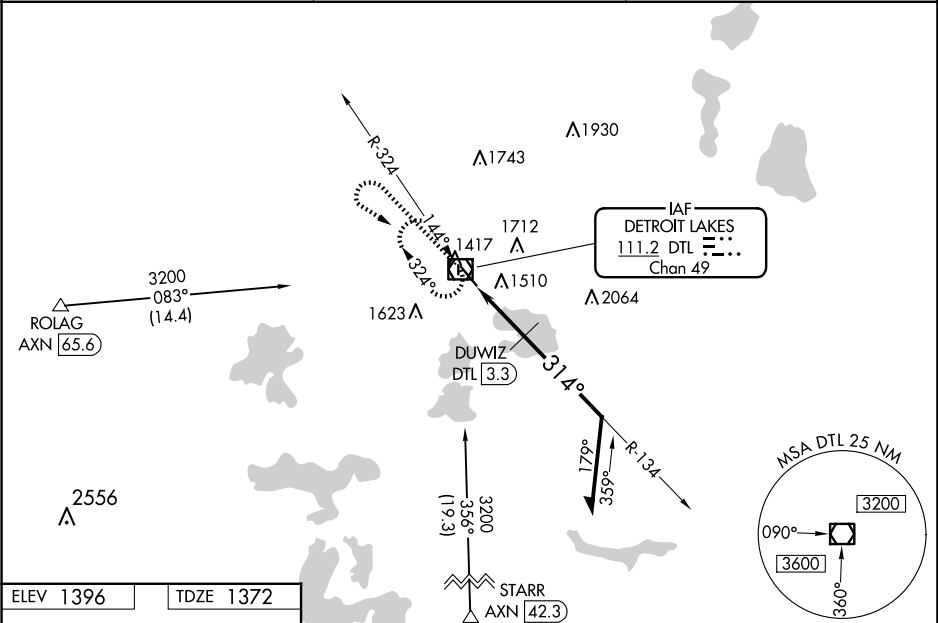

ELEV 1396	TDZE 1372
-----------	-----------

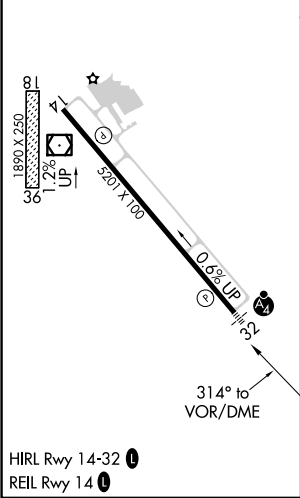

2500	3200	DTL	DTL VOR/DME	*2300 when using Park Rapids altimeter setting.
↑	↶	☐	☐	
1734° DUWIZ DTL 3.3 DTL 1.9 3.00° TCH 42 314° 2200* 3200 1.1 NM 1.4 NM				
Remain within 10 NM				
CATEGORY	A	B	C	D
S-32	2200-¾ 828 (900-¾)	2200-1 828 (900-1)	2200-2 828 (900-2)	828 (900-2)
CIRCLING	2200-1 804 (900-1)	2200-1¼ 804 (900-1¼)	2200-2½ 804 (900-2½)	804 (900-2½)
DUWIZ FIX MINIMUMS				
S-32	1760-¾ 388 (400-¾)	1760-7/8 388 (400-7/8)	1760-7/8 388 (400-7/8)	388 (400-7/8)
CIRCLING	1820-1 424 (500-1)	1860-1 464 (500-1)	2080-2 684 (700-2)	2140-2½ 744 (800-2½)