

WAAS CH 53604 W36A	APP CRS 360°	Rwy Idg TDZE Apt Elev	5550 326 333
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 36
GEORGE M BRYAN (STF)

RNP APCH-GPS.


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C .
When local altimeter setting not received, use Golden Triangle Rgnl altimeter setting and increase LPV DA to 566 feet; increase LNAV/VNAV DA to 690 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat C ¼ SM.
Baro-VNAV and VDP NA when using Golden Triangle Rgnl altimeter setting.

MISSED APPROACH: Climb to 3400 direct FESBO and hold, continue climb-in-hold to 3400.

AWOS-3PT 118.975	COLUMBUS APP CON★ 135.6 323.275	CLNC DEL 126.25	UNICOM 122.7 (CTAF)
----------------------------	---	---------------------------	-------------------------------

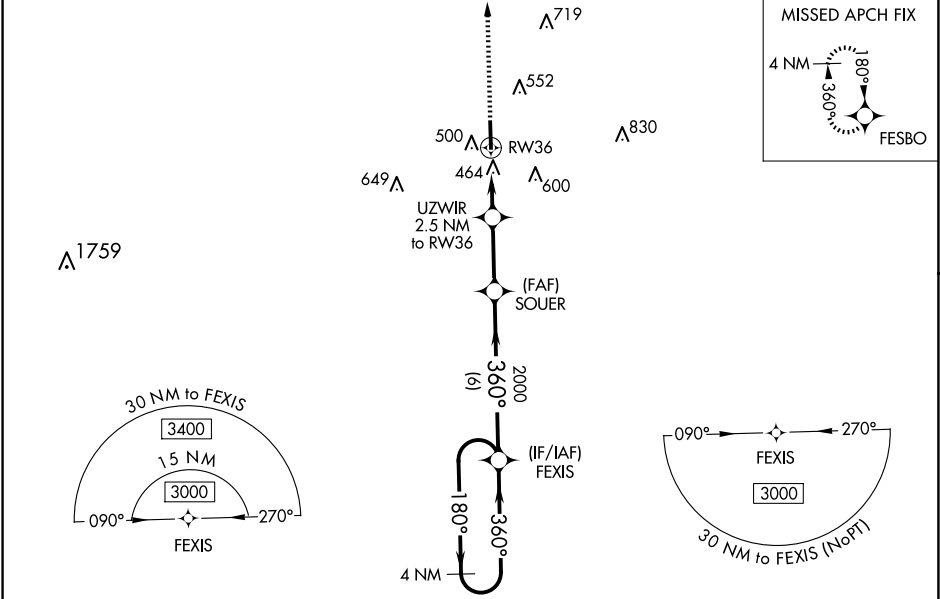

ELEV 333	TDZE 326
----------	----------

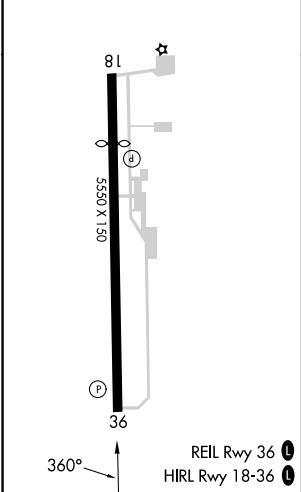

3400	FESBO	UZWIR 2.5 NM to RW36	SOUER	FEXIS	4 NM Holding Pattern
*LNAV only.		*1.1 NM to RW36	*1140	2000	180° → 3000 ← 360°
RW36	1.1 NM	1.4 NM	2.7 NM	6 NM	GP 3.00° TCH 40
CATEGORY	A	B	C	D	
LPV DA	526-¾		200 (200-¾)		
LNAV/VNAV DA	650-1		324 (400-1)		
LNAV MDA	720-1 394 (400-1)		720-1½ 394 (400-½)		
CIRCLING	920-1 587 (600-1)		920-1½ 587 (600-½) 1020-2¼ 687 (700-2¼)		

SC-4, 12 JUN 2025 to 10 JUL 2025

SC-4, 12 JUN 2025 to 10 JUL 2025