

LOC I-LQG	APP CRS	Rwy Idg	5002
111.7	073°	TDZE	793
		Apt Elev	793


ILS or LOC RWY 7
LORAIN COUNTY RGNL (LPR)

⚠ For inoperative MALSR, increase S-LOC 7 Cats C/D visibility to 1½ mile. VDP NA with Cleveland-Hopkins Intl altimeter setting. When local altimeter setting not received, use Cleveland-Hopkins Intl altimeter setting and increase all DA 36 feet and all MDA 40 feet.

MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 on heading 270° then left turn direct DJB VOR/DME and hold.

ASOS 118.925	CLEVELAND APP CON 125.35 346.325	CLNC DEL 125.7	UNICOM 122.7 (CTAF) 0
-----------------	-------------------------------------	-------------------	---------------------------------

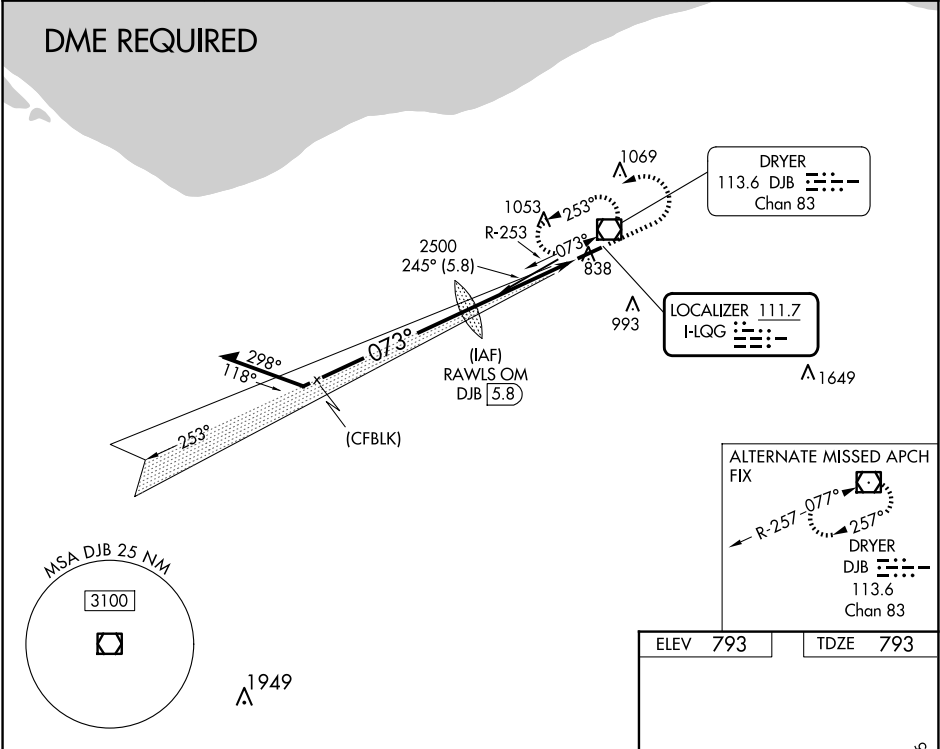

Remain within 10 NM

RAWLS OM DJB 5.8

2500 253° 2263

2500 073°

GS 3.00° TCH 54

3 NM 1.4 NM

1400 3000 hdg 270° DJB

*LOC only.

*DJB 2.8

CATEGORY	A	B	C	D
S-ILS 07	993-½ 200 (200-½)			
S-LOC 07	1280-½ 487 (500-½)		1280-1 487 (500-1)	
CIRCLING	1280-1 487 (500-1)	1360-1 567 (600-1)	1420-1¾ 627 (700-1¾)	1420-2 627 (700-2)

REIL Rwy 25 **0**

HIRL Rwy 7-25 **0**

5002 X 100

073°

ELEV 793		TDZE 793	
FAF to MAP 4.4 NM			
Knots	60	90	120 150 180
Min:Sec	4:24	2:56	2:12 1:46 1:28

EC-2, 12 JUN 2025 to 10 JUL 2025

EC-2, 12 JUN 2025 to 10 JUL 2025