

WAAS CH 90236 W26A	APP CRS 257°	Rwy Idg 5002 TDZE 20 Apt Elev 23
--	------------------------	---

RNAV (GPS) RWY 26
JENNINGS (3R7)

JENNINGS (3R7)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).

T DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Lake Charles Rgnl altimeter setting.


A Night landing: Rwy 8, 31 NA. Helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use Lake Charles Rgnl altimeter setting: Increase all DA 69 ft and all MDA 80 ft; increase LPV and LNAV/VNAV all Cats visibility $\frac{1}{4}$ mile, increase LNAV/Circling Cat C visibility $\frac{1}{4}$ mile.

MISSED APPROACH:
Climb to 3000 direct
CEGUV and hold.

AWOS-3PT 121.150	LAKE CHARLES APP CON ★ 119.8 282.3	UNICOM 122.8 (CTAF) 0
----------------------------	--	--

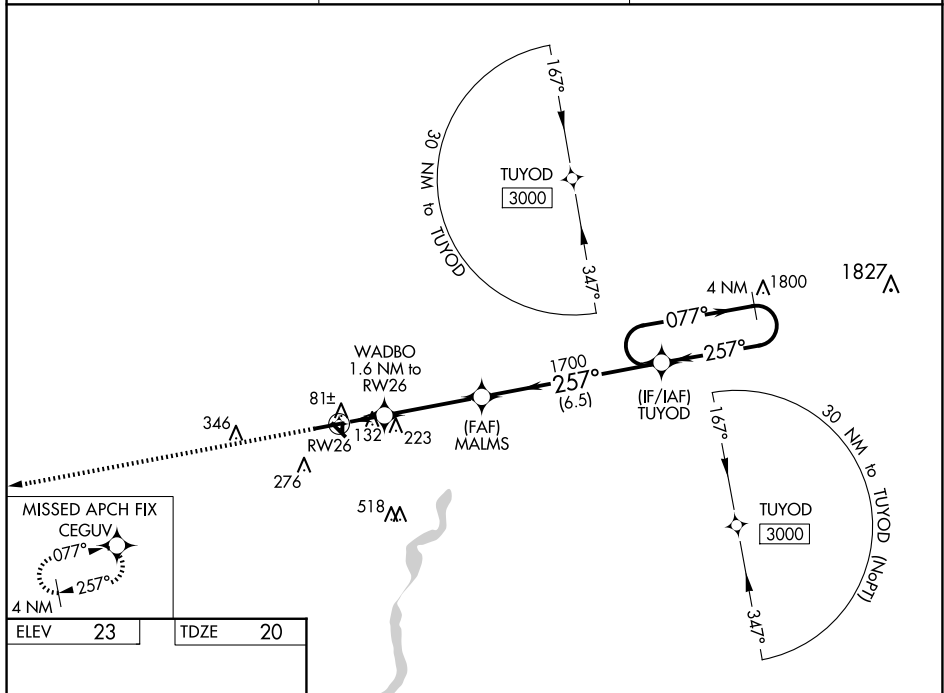

ELEV	23	TDZE	20
------	----	------	----



***LNAV only.**

CEGUV

WADBO
1.6 NM to RW26
***580**

MALMS
1700

TUYOD
4 NM Holding Pattern
077° →
← 257°
3000

GP 3.00° TCH 50

Distances:
RW26 to WADBO: 1 NM
WADBO to MALMS: 0.6 NM
MALMS to TUYOD: 3.5 NM
TUYOD to 3000: 6.5 NM

Angles:
257°

CATEGORY	A	B	C	D
LPV DA	290-7/8	270 (300-7/8)		NA
LNAV/VNAV DA	300-7/8	280 (300-7/8)		NA
LNAV MDA	400-1	380 (400-1)		NA
C CIRCLING	580-1	557 (600-1)	680-1 3/4 657 (700-1 3/4)	NA

REIL Rwy 8, 26, 13, and 31
MIRI Rwy 8-26 and 13-31

JENNINGS, LOUISIANA

Orig-A 23JUN16

30°15'N-92°40'W

JENNINGS (3R7)

RNAV (GPS) RWY 26