

WAAS CH 70441 W11A	APP CRS 115°	Rwy Idg TDZE 790 Apt Elev 790
--	------------------------	---

RNAV (GPS) RWY 11



GEORGETOWN EXEC (GTU)

RNP APCH

▼ Rwy 11 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Skylark Field altimeter setting and increase all MDA 80 feet. Increase LP and Circling Cat C/D visibility ¼ SM and LNAV Cat C/D visibility ⅓ SM. VDP NA when using Skylark Field altimeter setting.

MISSED APPROACH:
Climbing left turn to 3000 direct DARTE and hold.

ATIS 118.6	AUSTIN APP CON 119.0 370.85	GEORGETOWN TOWER ★ 120.225 (CTAF) 0	GND CON 119.125	CLNC DEL 119.125	CLNC DEL 121.1 (when twr closed)	UNICOM 123.0
----------------------	---------------------------------------	--	---------------------------	----------------------------	---	------------------------

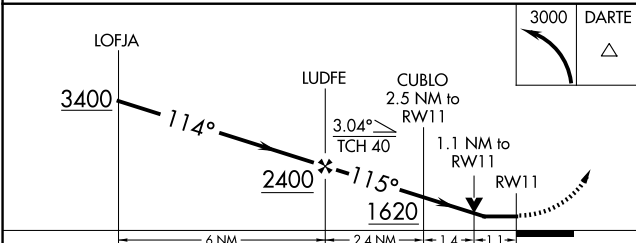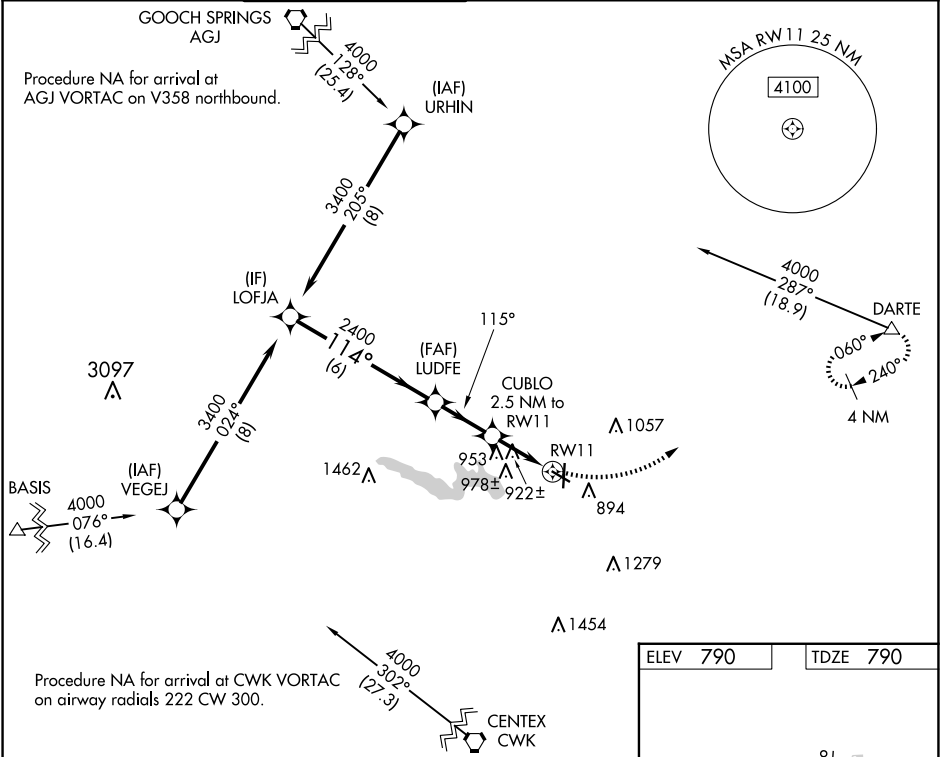

CATEGORY	A	B	C	D
LP MDA	1180-1	390 (400-1)	1180-1½	390 (400-1½)
LNAV MDA	1220-1	430 (500-1)	1220-1¼	430 (500-1¼)
CIRCLING	1240-1 450 (500-1)	1340-1 550 (600-1)	1360-1½ 570 (600-1½)	1640-2¾ 850 (900-2¾)

