

LOC I-UGZ	APP CRS	Rwy Idg	5501
111.9	227°	TDZE	134
		Apt Elev	134

ILS or LOC RWY 23

WAYNE EXEC JETPORT (GWW)

DME or RADAR required.

▼



▲

When local altimeter setting not received, use Smithfield altimeter setting and increase DA to 388 and all MDAs 60 feet, increase S-LOC Cats C/D visibility ¼ SM, Circling Cats C/D ½ SM. Inop table does not apply to S-ILS 23.

ODALS

MISSED APPROACH: Climb to 900 then climbing right turn to 2000 on heading 040° and on ISO VORTAC R-302 to WADUG INT/ISO 23.3 DME and hold.

AWOS-3P	SEYMOUR JOHNSON APP CON ★	UNICOM
118.975	121.175 290.9	122.975 (CTAF) 0

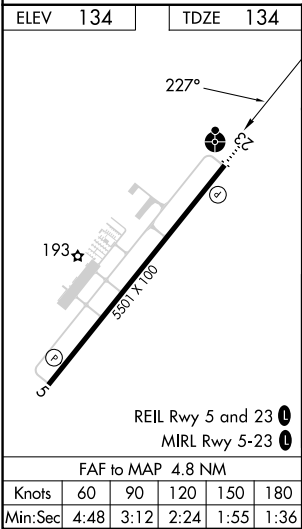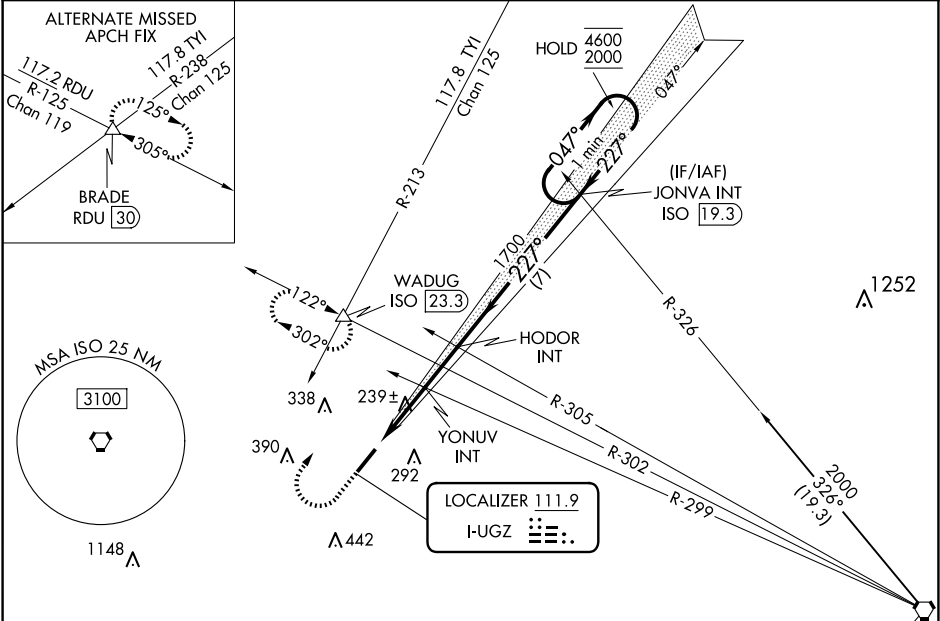

900	2000	ISO R-302	WADUG	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 44).	One Minute Holding Pattern
JONVA INT 047° 4600 2000					
HODOR INT 1700					
YONUV INT 1100 1700					
GS 3.00° TCH 51					
2.9 NM 1.9 NM 7 NM					
CATEGORY	A	B	C	D	
S-ILS 23	334-¾ 200 (200-¾)				
S-LOC 23	500-¾ 366 (400-¾)		500-1 366 (400-1)		
CIRCLING	580-1 446 (500-1)		640-1 506 (600-1)		760-1¾ 626 (700-1¾)
					760-2 626 (700-2)