

WAAS CH 97603 W14A	APP CRS 135°	Rwy Idg TDZE 327 Apt Elev 327	6021
--	------------------------	---	-------------


RNAV (GPS) RWY 14

EAST GEORGIA RGNL (SBO)

▼ Baro-VNAV and VDP NA when using Vidalia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Vidalia altimeter setting and increase LPV DA to 708 feet, LNAV/VNAV DA to 698 feet, and all MDA 80 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ SM, LNAV Cats C/D visibility ⅓ SM, and Circling Cats C/D visibility ¼ SM. Rwy 14 helicopter visibility reduction below ¾ SM NA. DME /DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 2500 direct
WINSI and hold.

AWOS-3 133.375	ATLANTA CENTER 127.95 343.75	UNICOM 122.975 (CTAF) 0
--------------------------	--	-----------------------------------

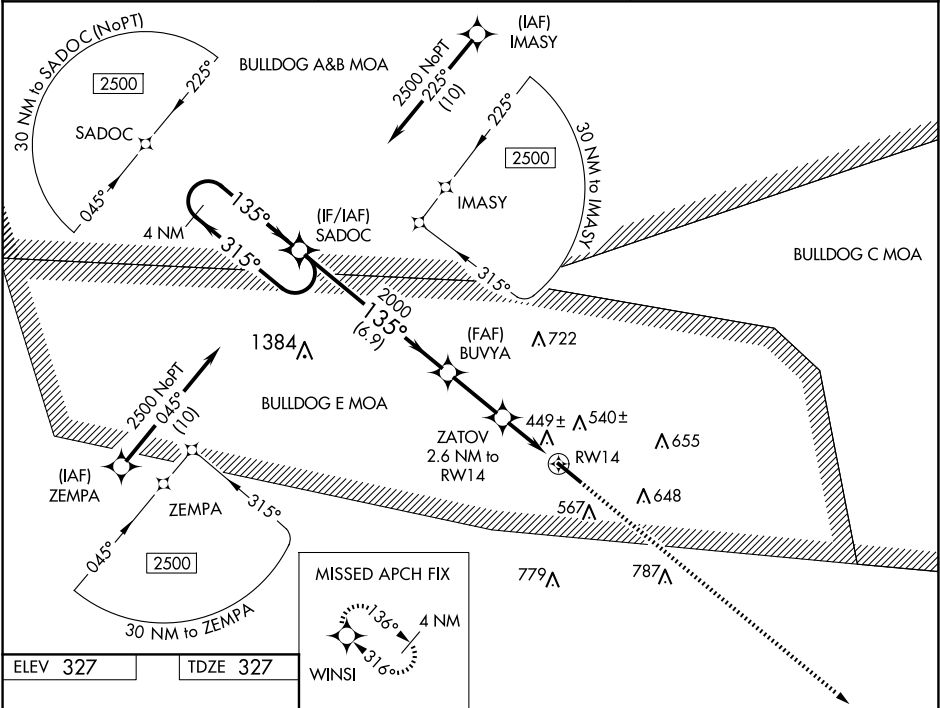

ELEV 327	TDZE 327	4 NM Holding Pattern	SADOC	2500	WINSI
135°	315°	GP 3.00° TCH 42	BUYYA 2000	ZATOV 2.6 NM to RW14	*LNAV only
6021 x 100	327	2000	*1180	*1 NM to RW14	RW14
6.9 NM 2.5 NM 1.6 NM 1 NM					
CATEGORY	A	B	C	D	
LPV DA		643-1	316 (400-1)		
LNAV/VNAV DA		633-1	306 (400-1)		
LNAV MDA		700-1	373 (400-1)		
CIRCLING	900-1 573 (600-1)	920-1 593 (600-1)	1000-2 673 (700-2)	1000-2¼ 673 (700-2¼)	