


WAAS CH 72811 W18A	APP CRS 180°	Rwy Idg 5005 TDZE 338 Apt Elev 363	RNAV (GPS) RWY 18 HUNTSVILLE MUNI (UTS)
--	------------------------	---	---


▼ Baro-VNAV NA when using Conroe/North Houston Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA when using Conroe/North Houston Rgnl altimeter setting. When local altimeter setting not received, use Conroe/North Houston Rgnl altimeter setting and increase all DA 75 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cats and Circling Cat C visibility ¼ mile.

⚠ MISSED APPROACH: Climb to 4000 direct HINET and right turn via track 297° to OSCER and hold.

ASOS 119.425	HOUSTON CENTER 134.8 269.6	UNICOM 122.8 (CTAF) ①
------------------------	--------------------------------------	---------------------------------

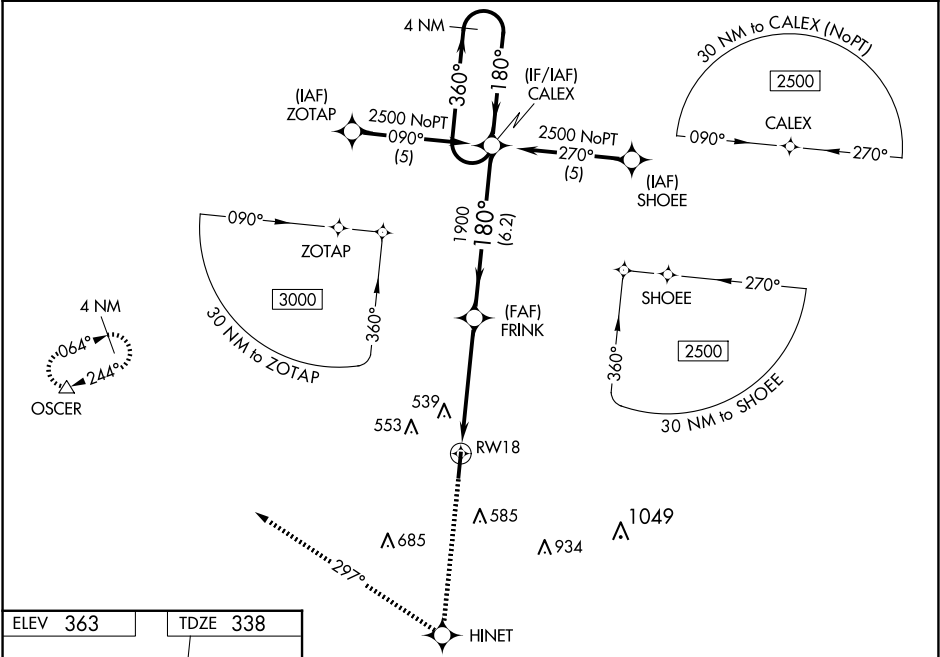

ELEV 363	TDZE 338
-----------------	-----------------

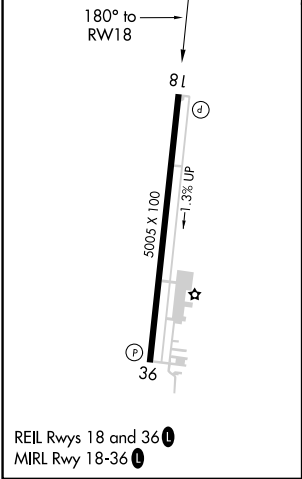

4000	HINET	OSCER	tr 297°	△
*LNAV only.				
CALEX				
4 NM Holding Pattern				
RW18				
*1.4 NM to RW18				
FRINK				
1900				
1.4 NM				
3.4 NM				
6.2 NM				
CATEGORY	A	B	C	D
LPV DA	588-1	250 (300-1)		NA
LNAV/VNAV DA	886-2	548 (600-2)		NA
LNAV MDA	840-1	502 (500-1)	840-1½ 502 (500-1½)	NA
CIRCLING	920-1	557 (600-1)	1120-2¼ 757 (800-2¼)	NA