

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>78304</b><br><b>W21A</b> | APP CRS<br><b>206°</b> | Rwy Idg<br>TDZE <b>485</b><br>Apt Elev <b>485</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 21  
ST CLAIR COUNTY (PLR)


▼

▲

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Anniston altimeter setting and increase LPV DA to 799 feet and all Cats visibility to 1, increase LNAV/VNAV DA to 964 feet and all visibilities to 1½, increase all MDA 80 feet and LNAV Cat C/D to 1¼ and Circling Cat C to 2½ and Cat D to 3. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Anniston altimeter setting.

MISSED APPROACH:  
Climb to 4000 direct HANUR and hold, continue climb-in-hold to 4000.

|                           |                                          |                       |                                |
|---------------------------|------------------------------------------|-----------------------|--------------------------------|
| AWOS-3P<br><b>119.625</b> | BIRMINGHAM APP CON<br><b>123.8 256.8</b> | GCO<br><b>121.725</b> | UNICOM<br><b>123.05 (CTAF)</b> |
|---------------------------|------------------------------------------|-----------------------|--------------------------------|

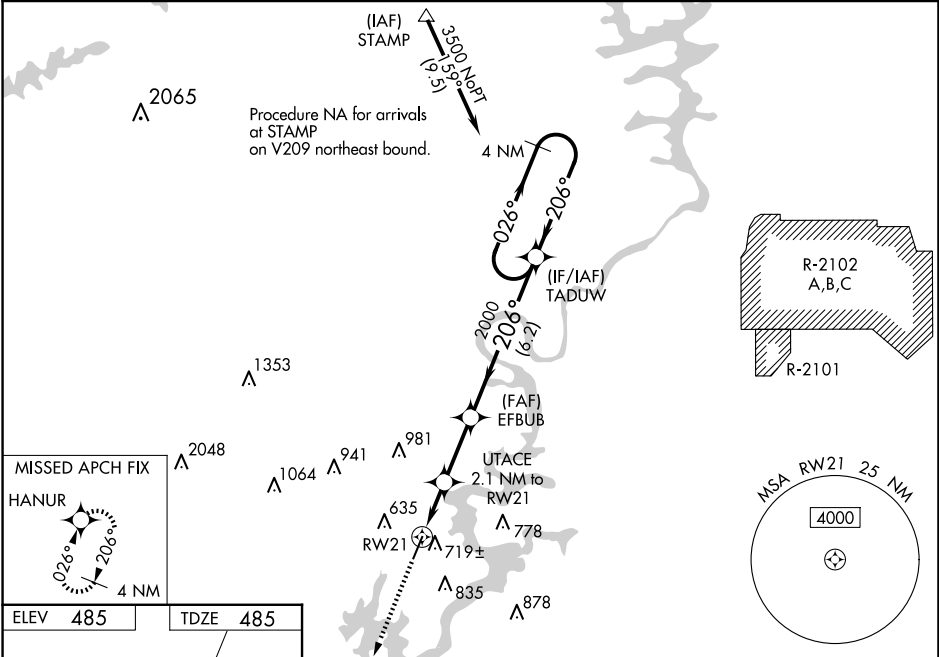

ELEV **485** | TDZE **485**

|              |                 |                         |                         |                               |
|--------------|-----------------|-------------------------|-------------------------|-------------------------------|
| 4000         | HANUR           | UTACE<br>2.1 NM to RW21 | EFBUB<br>2000           | TADUW<br>4 NM Holding Pattern |
| *LNAV only.  | *1.4 NM to RW21 | 1200*                   | 2000                    | 3500                          |
| 1.4 NM       | 0.7 NM          | 2.5 NM                  | 6.2 NM                  |                               |
| CATEGORY     | A               | B                       | C                       | D                             |
| LPV DA       | 735-¾           |                         | 250 (300-¾)             |                               |
| LNAV/VNAV DA | 900-1¾          |                         | 415 (500-1¾)            |                               |
| LNAV MDA     | 980-1           | 495 (500-1)             | 980-1¾                  | 495 (500-1¾)                  |
| CIRCLING     | 1180-1          | 695 (700-1)             | 1240-2¼<br>755 (800-2¼) | 1340-2¾<br>855 (900-2¾)       |

MIRL Rwy 3-21

GP 3.00°  
TCH 53

SE-4, 12 JUN 2025 to 10 JUL 2025

SE-4, 12 JUN 2025 to 10 JUL 2025