


WAAS CH 78136 W28A	APP CRS 279°	Rwy Idg TDZE Apt Elev	3950 153 153
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28
PLANT CITY (PCM)

⚠ Baro-VNAV NA when using Lakeland altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Night landing: Rwy 28 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received use Lakeland altimeter setting and increase all DA/MDA 20 feet.

MISSED APPROACH:
Climb to 2000 direct UJUO and hold.

AWOS-3 120.025	TAMPA APP CON 120.65 290.3	CLNC DEL 121.725 (GCO)	UNICOM 123.05 (CTAF) 0
--------------------------	--------------------------------------	----------------------------------	----------------------------------

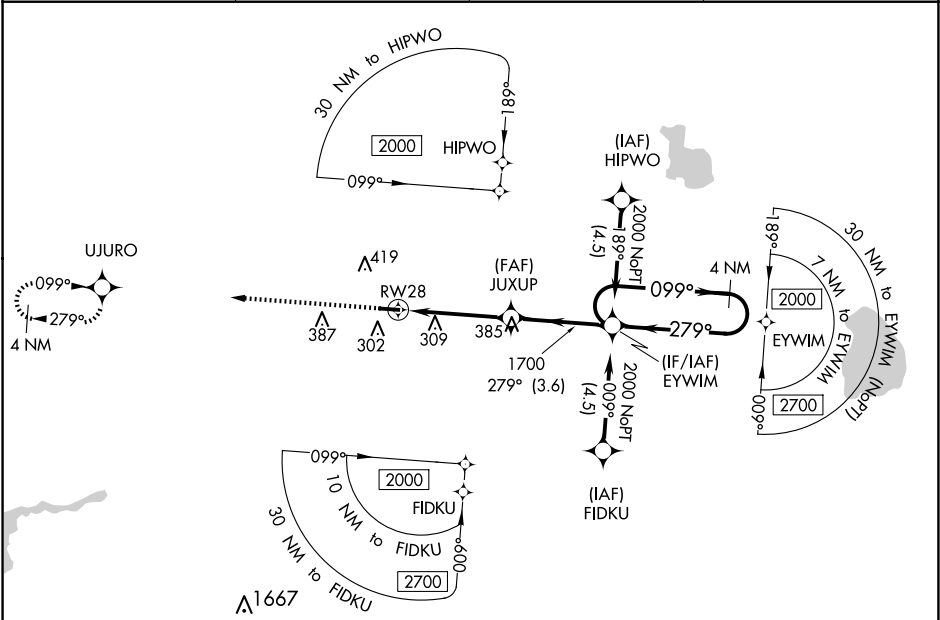

ELEV 153	TDZE 153
-----------------	-----------------

2000 UJUO

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 36).

4 NM Holding Pattern

GP 3.50° TCH 57

28

3950 X 75

0.3% UP

CATEGORY	A	B	C	D
LPV DA	414-1	261 (300-1)	NA	
LNAV/VNAV DA	459-1	306 (400-1)	NA	
LNAV MDA	600-1	447 (500-1)	NA	
C CIRCLING	680-1 527 (600-1)	720-1 567 (600-1)	NA	

SE-3, 12 JUN 2025 to 10 JUL 2025

SE-3, 12 JUN 2025 to 10 JUL 2025