


WAAS CH 40328 W25A	APP CRS 251°	Rwy Idg 5001 TDZE 781 Apt Elev 781
--	------------------------	---

RNAV (GPS) RWY 25
ROCHELLE MUNI/KORITZ FLD (RPJ)

T Baro-VNAV NA when using Chicago/Rockford Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Chicago/Rockford Intl altimeter setting; increase LPV DA to 1079 feet and LNAV/VNAV DA to 1152 feet and all MDA 60 feet; increase LNAV/VNAV visibility all Cats and LNAV Cat C/D visibility $\frac{1}{8}$ mile; increase Circling Cat C visibility $\frac{1}{4}$ mile. Helicopter visibility reduction below $\frac{3}{4}$ SM NA. VDP NA when using Chicago/Rockford Intl altimeter setting.

MISSED APPROACH:
Climb to 2600 direct
BATBE and hold.

AWOS-3 125.2	ROCKFORD APP CON 126.0 327.0	UNICOM 122.975 (CTAF) L
------------------------	--	-----------------------------------

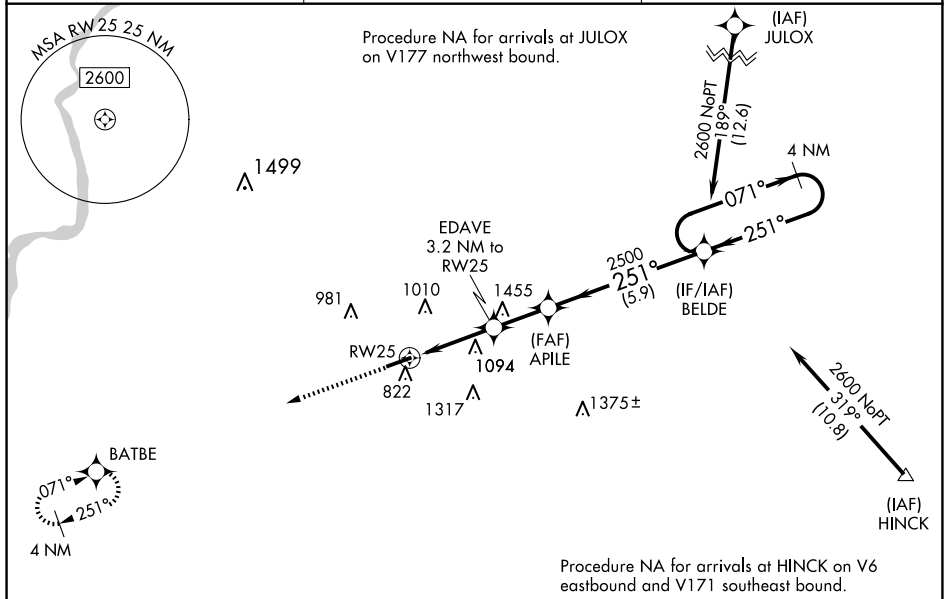

ELEV 781		TDZE 781
----------	--	----------

