

WAAS CH 82041 W10A	APP CRS 096°	Rwy Idg 4201 TDZE 1089 Apt Elev 1090
--	------------------------	---

RNAV (GPS) RWY 10

NEW CASTLE HENRY COUNTY MARLATT FLD (UWL)

RNP APCH - GPS.



▼ Rwy 10 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using AID altimeter setting. When local altimeter setting not received, use Anderson altimeter setting; increase LPV DA to 1408 feet; increase LNAV/VNAV DA to 1424 feet; increase all MDAs 80 feet, LNAV visibility Cat C/D $\frac{3}{4}$ SM, and Circling visibility Cat C/D $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 3000 direct
TASUY and hold.



AWOS-3
132.375

INDIANAPOLIS APP CON
135.45 317.8

UNICOM
123.05 (CTAF) **L**

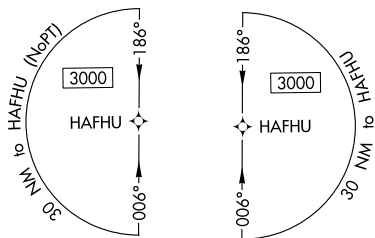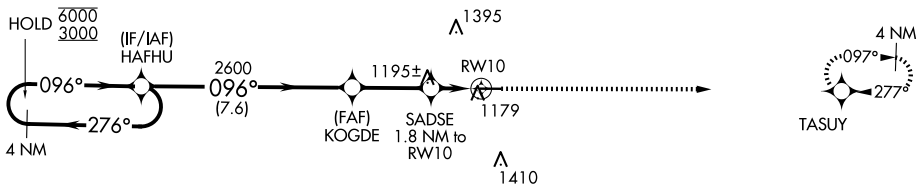 $\overline{\Delta 1707}$ 

ELEV	1090		TDZE	1089
------	------	--	------	------

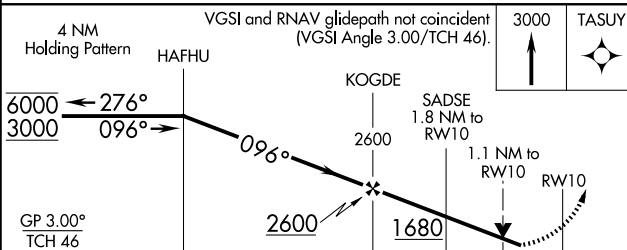

CATEGORY	A	B	C	D
LPV DA	1339-1 250 (300-1)			
LNAV/ VNAV DA	1355-1 266 (300-1)			
LNAV MDA	1460-1 371 (400-1)			
 CIRCLING	1520-1 430 (500-1)	1540-1 450 (500-1)	1720-1 ³ / ₄ 630 (700-1 ³ / ₄)	1720-2 630 (700-2)