


|                                        |                        |                                                     |
|----------------------------------------|------------------------|-----------------------------------------------------|
| WAAS<br>CH <b>86623</b><br><b>W30A</b> | APP CRS<br><b>306°</b> | Rwy Idg<br>TDZE <b>2456</b><br>Apt Elev <b>2458</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|

RNAV (GPS) RWY 30

DAWSON COMMUNITY (GDV)

|                                                                                                                                                                                                          |                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| RNP APCH.<br>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 28°C. When local altimeter setting not received, procedure NA. Rwy 30 helicopter visibility reduction below ¾ SM NA. | MISSED APPROACH: Climb to 6000 direct ACAKO and hold, continue climb-in-hold to 6000. |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|

|                            |                                         |                                 |
|----------------------------|-----------------------------------------|---------------------------------|
| AWOS-3PT<br><b>135.075</b> | SALT LAKE CENTER<br><b>126.85 305.2</b> | UNICOM<br><b>122.8 (CTAF) 1</b> |
|----------------------------|-----------------------------------------|---------------------------------|

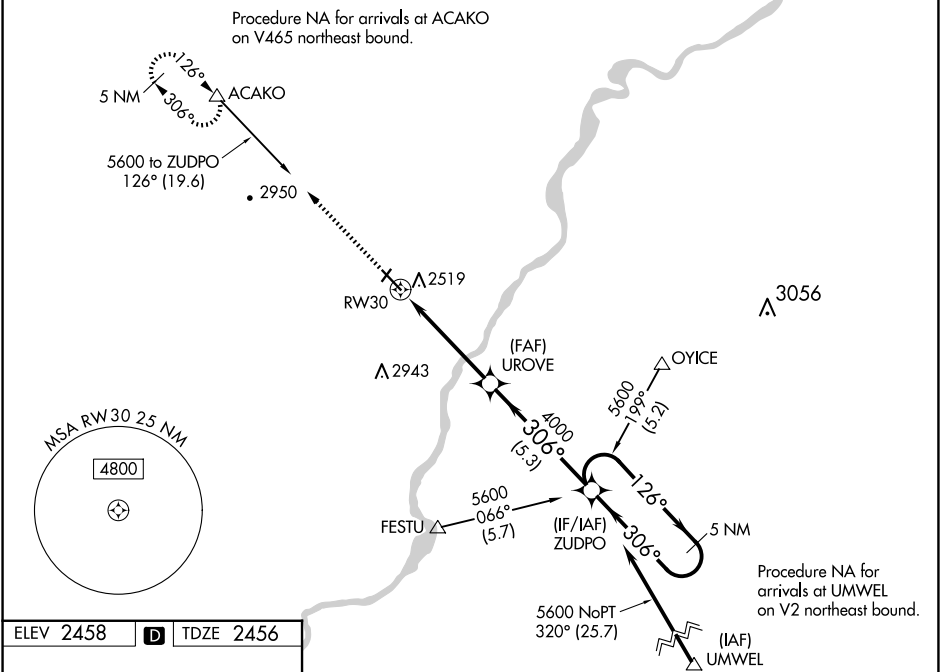

|  |                                                                                   |                                                                           |                       |                         |                         |
|--|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------|-----------------------|-------------------------|-------------------------|
|  | 6000<br>ACAKO<br>VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 37). | 5 NM Holding Pattern<br>ZUDPO<br>126° → 5600<br>← 306°<br>GP 3.00° TCH 52 |                       |                         |                         |
|  | UROVE<br>4000<br>RW30<br>4000<br>4.7 NM<br>5.3 NM                                 |                                                                           |                       |                         |                         |
|  | CATEGORY                                                                          | A                                                                         | B                     | C                       | D                       |
|  | LPV DA                                                                            | 2706-1 250 (300-1)                                                        |                       |                         |                         |
|  | LNAV/VNAV DA                                                                      | 2706-1 250 (300-1)                                                        |                       |                         |                         |
|  | LNAV MDA                                                                          | 2780-1 324 (400-1)                                                        |                       |                         |                         |
|  | CIRCLING                                                                          | 2840-1<br>382 (400-1)                                                     | 2920-1<br>462 (500-1) | 3280-2½<br>822 (900-2½) | 3280-2¾<br>822 (900-2¾) |
|  |                                                                                   |                                                                           |                       |                         |                         |