

VORTAC MAI

114.0

Chan 87

APP CRS

066°

Rwy Idg

TDZE

Apt Elev

N/A

N/A

141

VOR-A

DECATUR COUNTY INDUSTRIAL AIR PARK (BGE)

When local altimeter setting not received, use Tallahassee Intl altimeter setting and increase all MDAs 100 feet and Cat C, D visibility ½ SM.

MISSED APPROACH: Climb to 1200 then climbing right turn to 1700 via MAI R-066 to OOLAY INT/MAI 22 DME and hold.

AWOS-3PT

121.125

TALLAHASSEE APP CON★


128.7 254.3

CLNC DEL

124.775 335.65

UNICOM

122.975 0 (CTAF)

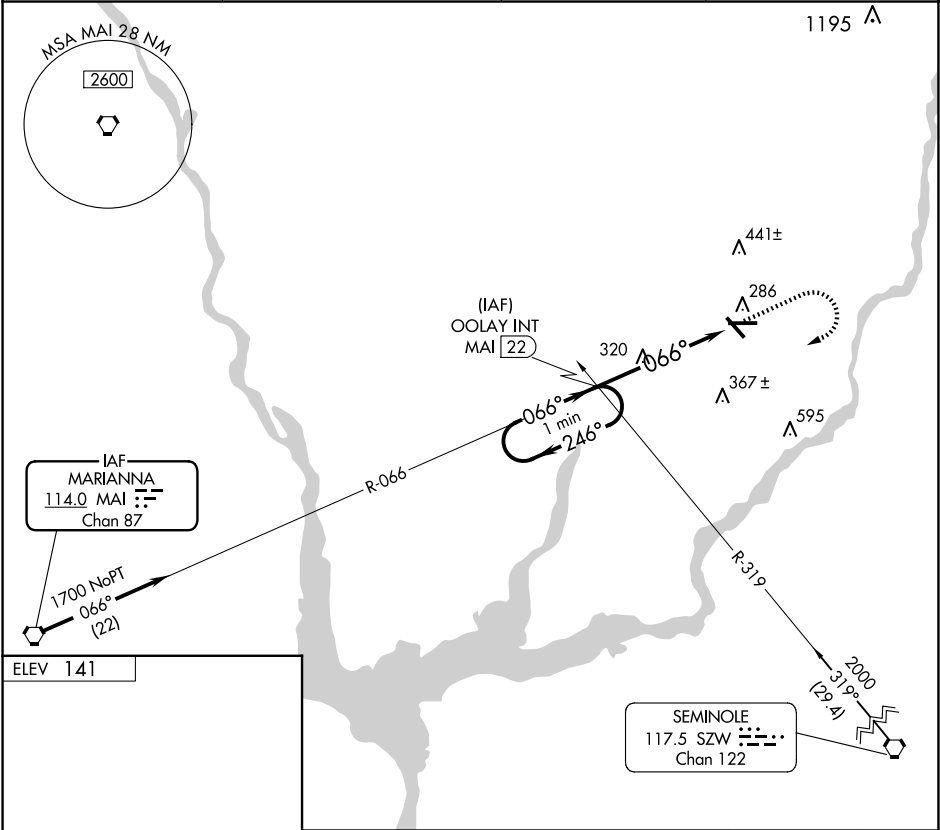

|                            |  |  |  |  |                  |  |              |      |           |
|----------------------------|--|--|--|--|------------------|--|--------------|------|-----------|
| One Minute Holding Pattern |  |  |  |  | OOLAY INT MAI 22 |  | 1200         | 1700 | OOLAY INT |
| 1700                       |  |  |  |  | 246°             |  | 066°         |      |           |
| 5.2 NM                     |  |  |  |  | MAI 27.2         |  |              |      |           |
| FAF to MAP 5.2 NM          |  |  |  |  | CATEGORY         |  | A            |      |           |
| Knots                      |  |  |  |  | 60               |  | 90           |      |           |
| Min:Sec                    |  |  |  |  | 5:12             |  | 3:28         |      |           |
|                            |  |  |  |  | 120              |  | 150          |      |           |
|                            |  |  |  |  | 2:36             |  | 2:05         |      |           |
|                            |  |  |  |  | 180              |  |              |      |           |
|                            |  |  |  |  | 1:44             |  |              |      |           |
| CIRCLING                   |  |  |  |  | 660-1            |  | 660-1¼       |      |           |
|                            |  |  |  |  | 519 (600-1)      |  | 519 (600-1¼) |      |           |
|                            |  |  |  |  | 800-1¾           |  | 800-1¾       |      |           |
|                            |  |  |  |  | 659 (700-1¾)     |  | 659 (700-1¾) |      |           |
|                            |  |  |  |  | 860-2¼           |  | 860-2¼       |      |           |
|                            |  |  |  |  | 719 (800-2¼)     |  | 719 (800-2¼) |      |           |