

WAAS CH 53329 W12A	APP CRS 119°	Rwy Idg TDZE 1516 Apt Elev 1516
--	------------------------	---

RNAV (GPS) RWY 12

CLEARFIELD-LAWRENCE (FIG)

RNP APCH - GPS.


▼

▲

Rwy 12 helicopter visibility reduction below ¾ SM NA. VDP NA when using Dubois altimeter setting. When local altimeter setting not received, use Dubois altimeter setting and increase all MDAs 100 feet; increase visibility LP Cat B ¼ SM and Cat C ⅓ SM, LNAV Cat C ½ SM and Circling Cat A and C ¼ SM.

MISSED APPROACH:
Climb to 4000 direct
EBUME and hold.

ASOS 119.275	NEW YORK CENTER 134.8 338.3	UNICOM 122.725 (CTAF)
------------------------	---------------------------------------	---------------------------------

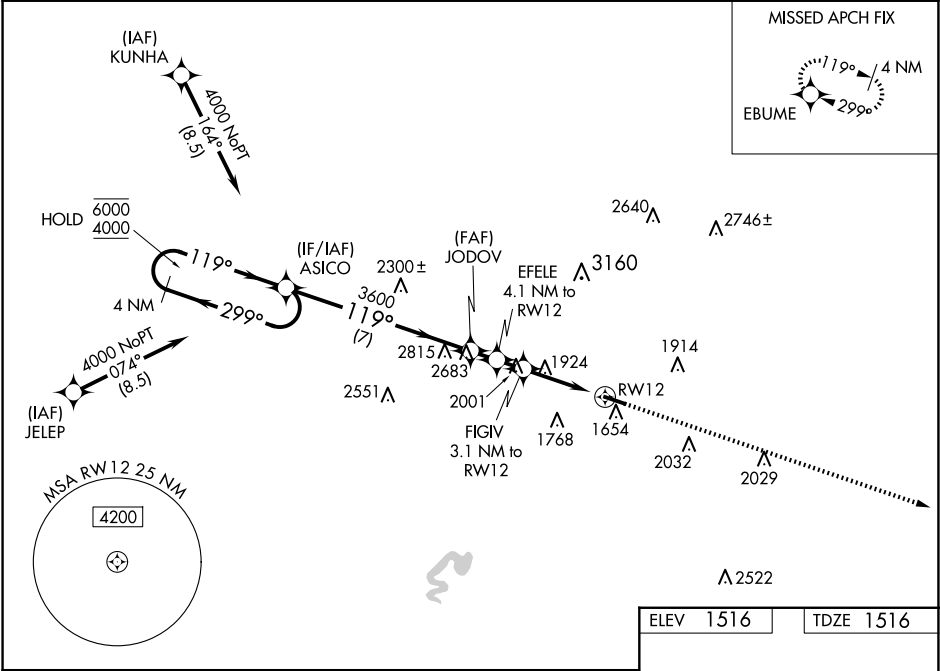

VGSI and descent angles not coincident
(VGSI Angle 3.10/TCH 29°).

4000

EBUME

4 NM Holding Pattern

ASICO

6000
4000

299°
119°

119°

3600

3200

2800

RW12

JODOV

4.1 NM to RW12

FIGIV

3.1 NM to RW12

1.9 NM to RW12

7 NM

1 NM

1 NM

1.2 NM

1.9 NM

CATEGORY	A	B	C	D
LP MDA	2180-1	664 (700-1)	2180-1½ 664 (700-1½)	NA
LNAV MDA	2260-1 744 (800-1)	2260-1¼ 744 (800-1¼)	2260-2 744 (800-2)	NA
CIRCLING	2260-1 744 (800-1)	2260-1¼ 744 (800-1¼)	2340-2½ 824 (900-2½)	NA

MIRL Rwy 12-30
REIL Rwy 30

119°

12

4499 X 75

30