

LOC/DME I-EKY
111.75
Chan **54** (Y)

APP CRS
053°

Rwy Idg
TDZE **700**
Apt Elev **700**


ILS or LOC RWY 5
BESSEMER (EKY)

NA

When local altimeter setting not received, use Alabaster altimeter setting and increase DA 41 feet, increase all MDAs 60 feet; increase S-LOC 5 Cat C visibility 1/8 SM and Cat D visibility 1/4 SM, increase Circling Cat C visibility 1/8 SM Cat D visibility 1/4 SM, increase JURAM fix S-LOC 5 Cat C visibility 1/8 SM and Cat D visibility 1/4 SM; increase Circling Cat D visibility 1/4 SM. VDP NA with Alabaster altimeter setting.

MISSED APPROACH: Climb to 1200 then climbing left turn to 3000 direct OKW VORTAC and hold.

AWOS-3PT 118.825	BIRMINGHAM APP CON 124.9 351.85	CLNC DEL 123.75	UNICOM 123.0 (CTAF) 0
----------------------------	---	---------------------------	--

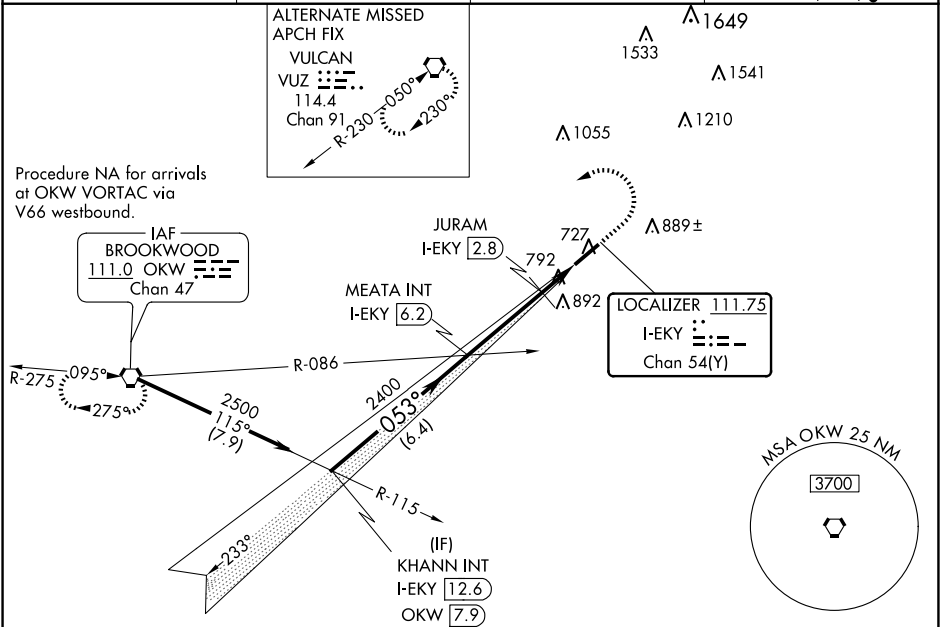

Procedure Turn NA

KHANN INT
I-EKY **12.6**

1260 when using
Alabaster altimeter setting.

MEATA INT
I-EKY **6.2**

JURAM
I-EKY **2.8**

* I-EKY **2.2**

* I-EKY **1.2**

* LOC only

2500 053°

2400

2400

* 1200

GS 3.00°
TCH 60

6.4 NM

3.4 NM

0.6 NM

1.1 NM

ELEV 700

TDZE 700

053° 5.1 NM
from FAF

HIRL Rwy 5-23 **0**
REIL Rwy 5 and 23 **0**

FAF to MAP 5.1 NM

Knots 60 90 120 150 180
Min:Sec 5:06 3:24 2:33 2:02 1:42

CATEGORY	A	B	C	D
S-ILS 5	900-3/4 200 (200-3/4)			
S-LOC 5	1200-1	500 (500-1)	1200-1 3/8 500 (500-1 3/8)	1200-1 1/2 500 (500-1 1/2)
CIRCLING	1200-1	500 (500-1)	1220-1 1/2 520 (600-1 1/2)	1320-2 620 (700-2)
JURAM FIX MINIMUMS				
S-LOC 5	1100-1	400 (400-1)	1100-1 1/8 400 (400-1 1/8)	1100-1 1/4 400 (400-1 1/4)
CIRCLING	1200-1	500 (500-1)	1220-1 1/2 520 (600-1 1/2)	1320-2 620 (700-2)