

WAAS CH 65999 W05A	APP CRS 053°	Rwy Idg TDZE 700 Apt Elev 700
--	------------------------	---

RNAV (GPS) RWY 5

BESSEMER (EKY)


▼

NA


Baro-VNAV NA when using Alabaster altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Alabaster altimeter setting and increase LPV DA to 941 feet, LNAV/VNAV DA to 1285 feet, and all MDAs 60 feet; increase Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climb to 4000 direct IKIMY and on track 108° to HANDE and hold.

AWOS-3PT 118.825	BIRMINGHAM APP CON 124.9 351.85	CLNC DEL 123.75	UNICOM 123.0 (CTAF)
----------------------------	---	---------------------------	-------------------------------

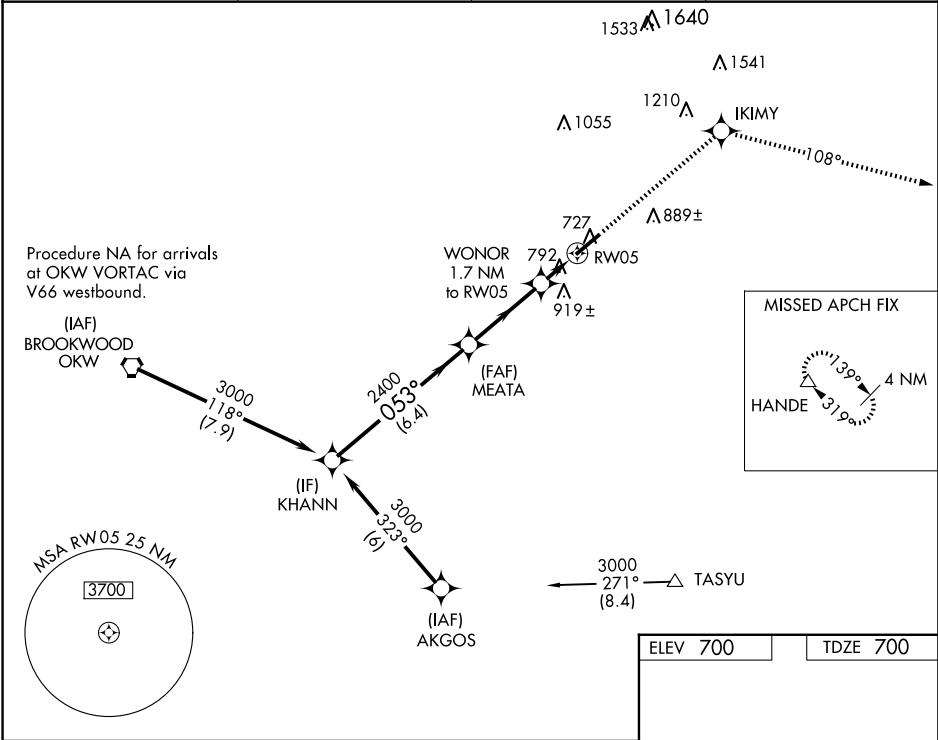

Procedure Turn NA	KHANN		MEATA		4000 ↑	IKIMY ✧	tr 108°	HANDE △
	3000		2400		WONOR 1.7 NM to RW05		* LNAV only	
	GP 3.00° TCH 60		2400		* 1300		RW05	
	6.4 NM		3.4 NM		1.7 NM			
CATEGORY	A		B		C		D	
LPV DA			900-¾		200 (200-¾)			
LNAV/ VNAV DA			1244-2		544 (600-2)			
LNAV MDA	1160-1		460 (500-1)		1160-1⅜ 460 (500-1⅜)		1160-1½ 460 (500-1½)	
CIRCLING	1200-1		500 (500-1)		1220-1½ 520 (600-1½)		1320-2 620 (700-2)	

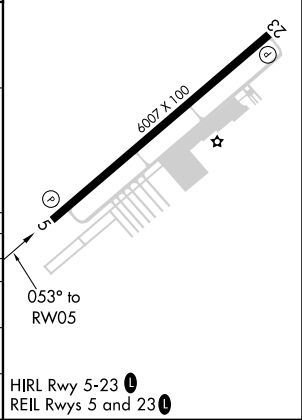

SE-4, 12 JUN 2025 to 10 JUL 2025

SE-4, 12 JUN 2025 to 10 JUL 2025