


WAAS CH 97614 W27A	APP CRS 275°	Rwy Idg TDZE Apt Elev	4502 763 763
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27

PUTNAM COUNTY (OWX)

RNP APCH. ▼ ▲ NA	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C . Baro-VNAV and VDP NA when using Findlay altimeter setting. Rwy 27 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Findlay altimeter setting and increase all DAs/MDAs 40 feet.	MISSED APPROACH: Climb to 3000 direct WIFES and hold.
------------------------	--	--

AWOS-3 120.525	TOLEDO APP CON 120.8 317.55	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

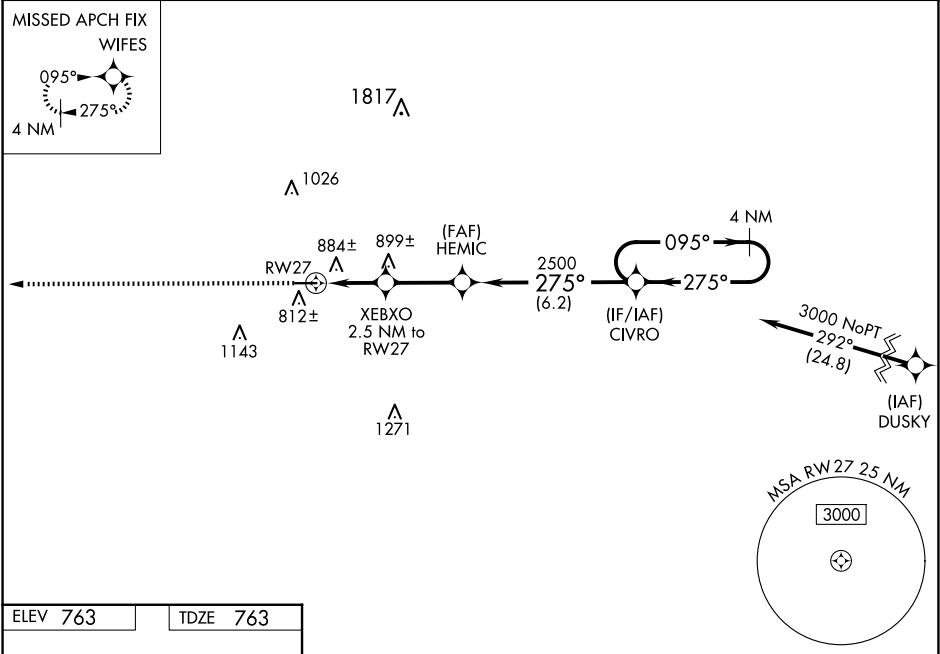

ELEV 763	TDZE 763
-----------------	-----------------

3000 WIFES

*LNAV only.

XEBXO 2.5 NM to RW27

HEMIC

CIVRO

4 NM Holding Pattern

275°

095°

3000

GP 3.00° TCH 44

1.0 1.5 NM 2.7 NM 6.2 NM

4502 X 75

799±

27

CATEGORY	A	B	C	D
LPV DA	1048-1	285 (300-1)	NA	
LNAV/VNAV DA	1185-1½	422 (500-1½)	NA	
LNAV MDA	1140-1	377 (400-1)	NA	
CIRCLING	1200-1 437 (500-1)	1220-1 457 (500-1)	NA	

REIL Rwy 9 and 27 0
MIRL Rwy 9-27 0