

WAAS CH 90538 W31A	APP CRS 316°	Rwy ldg 3401 TDZE 754 Apt Elev 754
--	------------------------	---



RNAV (GPS) RWY 31
WASHINGTON MUNI (A WG)

RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F).
▲ Rwy 31 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting: increase LPV and LNAV/VNAV DA to 1066 feet; increase all MDAs 80 feet and visibility LNAV Cat C ¼ SM and Circling Cat C ¼ SM.

MISSED APPROACH:
Climb to 3000 direct GLOMS and hold.

AWOS-3 127.825	CHICAGO CENTER 135.6 370.95	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

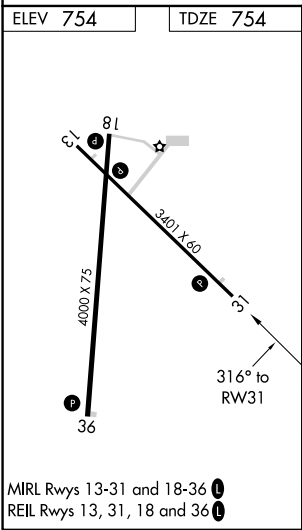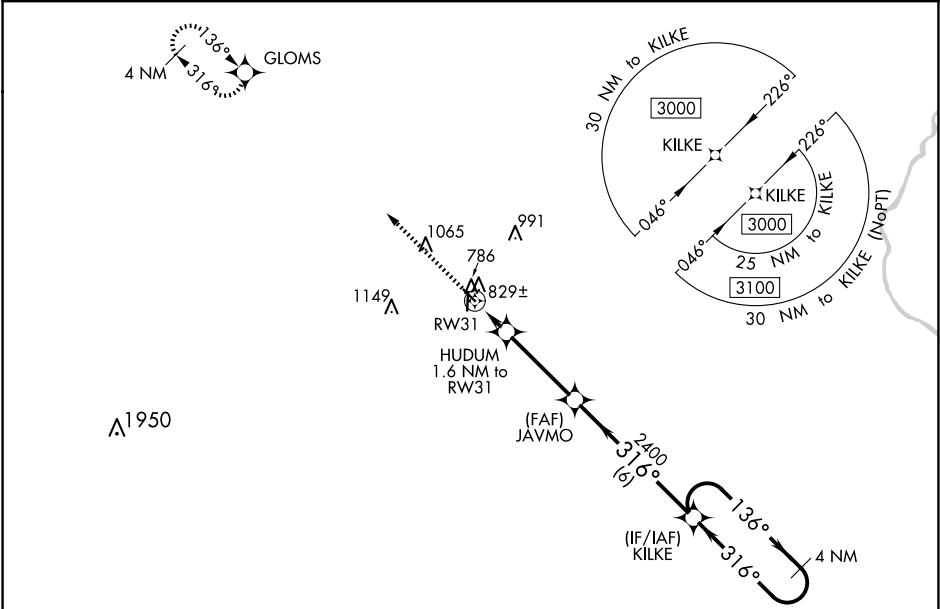

3000		GLOMS	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).		KILKE		4 NM Holding Pattern
*LNAV only		HUDUM 1.6 NM to RW31	JAVMO	2400	316°		
*0.9 NM to RW31		*1280		2400	136°		
0.9 NM		0.7 NM	3.5 NM	6 NM	GP 3.00° TCH 34		
CATEGORY	A	B	C	D			
LPV DA	1004-1	250 (300-1)		NA			
LNAV/VNAV DA	1004-1	250 (300-1)		NA			
LNAV MDA	1080-1	326 (400-1)		NA			
CIRCLING	1200-1 446 (500-1)	1260-1 506 (600-1)	1500-2¼ 746 (800-2¼)	NA			

NC-3, 12 JUN 2025 to 10 JUL 2025

NC-3, 12 JUN 2025 to 10 JUL 2025