

WAAS CH 97628 W06A	APP CRS 058°	Rwy Idg TDZE Apt Elev	5004 733 733
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

DAVIDSON COUNTY EXEC (E.XX)



⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Salisbury altimeter setting and increase all DA 37 feet and all MDA 40, increase LPV, LNAV/VNAV all Cats and LNAV Cat C visibility ½ mile. DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Salisbury altimeter setting.

MALSR

MISSED APPROACH:
Climb to 3000 direct
HACNI and hold.

AWOS-3 119.825	GREENSBORO APP CON 126.6 327.075	GCO 135.075	UNICOM 122.8 (CTAF) 0
--------------------------	--	-----------------------	---------------------------------

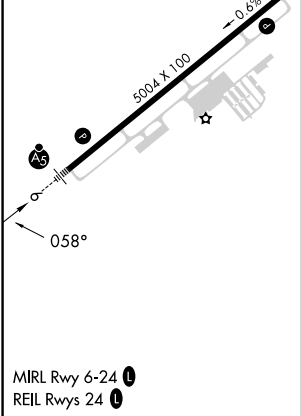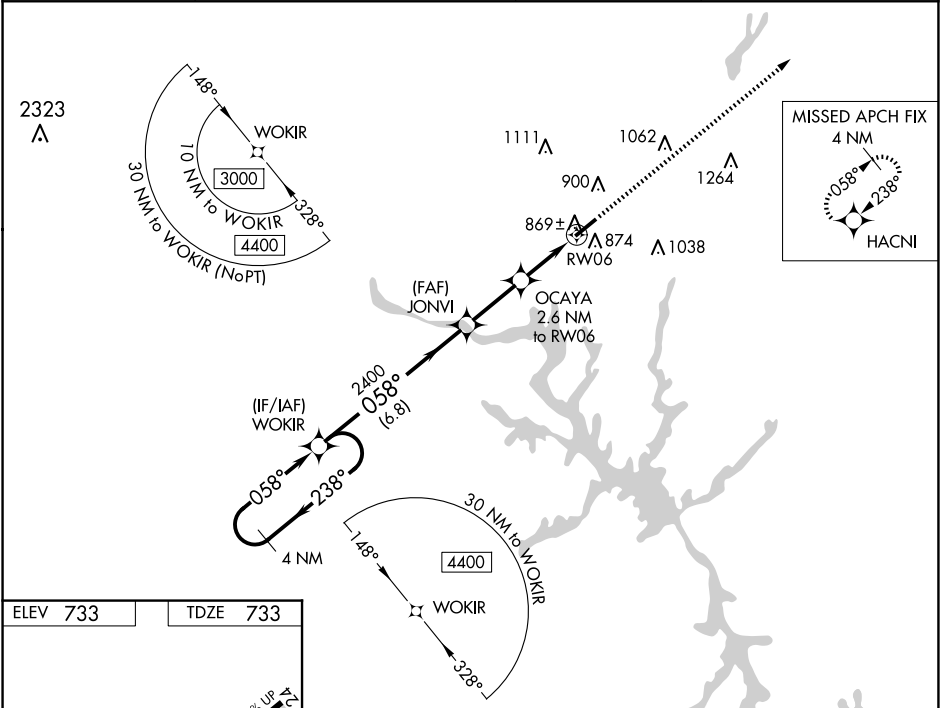

4 NM Holding Pattern		WOKIR		JONVI		OCAYA		RW06		3000		HACNI		
						2.6 NM to RW06		*0.8 NM to RW06		*LNAV only				
3000 ← 238°		058° →		2400		*1600								
GP 3.00° TCH 40														
		6.8 NM		2.5 NM		1.8 NM		0.8 NM						
CATEGORY	A	B	C	D										
LPV DA	983-7/8		250 (300-7/8)										NA	
LNAV/VNAV DA	1020-1		287 (300-1)										NA	
LNAV MDA	1120-1		387 (400-1)		1120-1 1/8		387 (400-1 1/8)						NA	
CIRCLING	1220-1		1240-1		1340-1 3/4		607 (700-1 3/4)						NA	
	487 (500-1)		507 (600-1)											