


WAAS CH 56433 W27A	APP CRS 273°	Rwy Idg TDZE 858 Apt Elev 858
--	------------------------	---

RNAV (GPS) RWY 27

KEWANEE MUNI (EZI)

▼ ▲ NA Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Galesburg altimeter setting; when not received, use Moline altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV all Cats and LNAV Cat C visibility 1/8 mile, and Circling Cat C visibility 1/4 mile.	MISSED APPROACH: Climb to 2400 direct WIKOK and hold.
---	--

QUAD CITY APP CON ★ 133.275 257.8	UNICOM 122.8 (CTAF) 0
---	---------------------------------

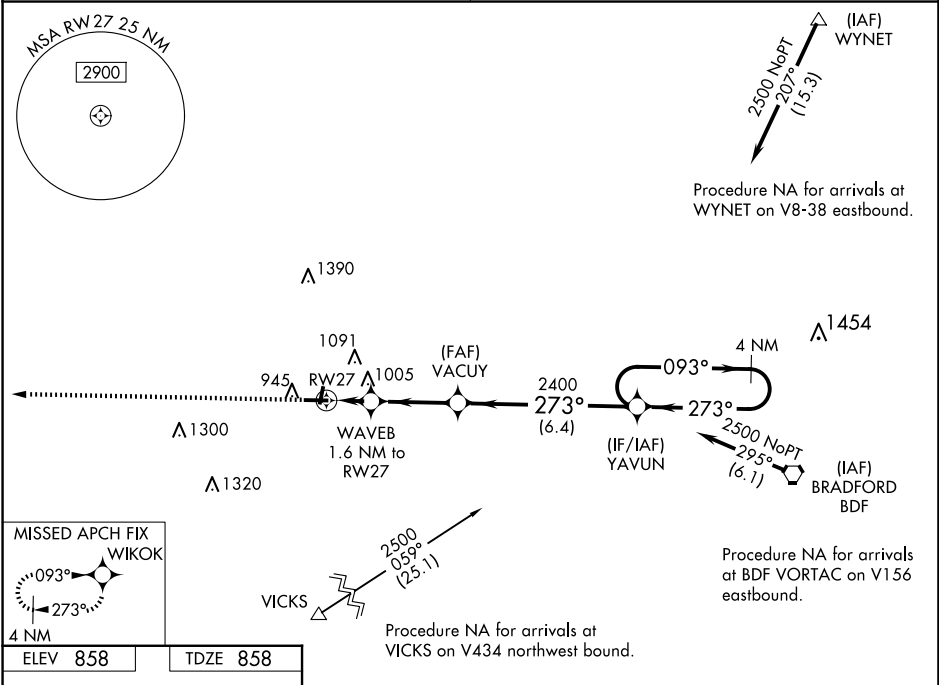

2400 ↑ *LNAV only	WIKOK 	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 23).				YAVUN 4 NM Holding Pattern
WAVEB 1.6 NM to RW27		VACUY 2400	273°		093° → 2500 ← 273°	
RW27 		*1400	2400	GP 3.00° TCH 40		
1.6 NM		3.1 NM	6.4 NM			
CATEGORY	A	B	C	D		
LPV DA	1183-1 $\frac{1}{8}$ 325 (400-1 $\frac{1}{8}$)				NA	
LNAV/ VNAV DA	1212-1 $\frac{1}{4}$ 354 (400-1 $\frac{1}{4}$)				NA	
LNAV MDA	1340-1	482 (500-1)	1340-1 $\frac{3}{8}$ 482 (500-1 $\frac{3}{8}$)	NA		
 CIRCLING	1340-1 482 (500-1)	1520-1 662 (700-1)	1520-1 $\frac{3}{4}$ 662 (700-1 $\frac{3}{4}$)	NA		