


VORTAC FBC	APP CRS	Rwy Idg	N/A
108.2	104°	TDZE	N/A
Chan 19		Apt Elev	830

VOR-A

WYANDOT COUNTY (56D)

Procedure NA at night. When local altimeter setting not received, use Marion altimeter setting: increase all MDAs 40 feet and visibility Cat C/D ¼ SM. NA	MISSED APPROACH: Climbing left turn to 2500 on FBC VORTAC R-104 to RITRO INT/15 DME and hold.
---	---

FDY ASOS	CLEVELAND APP CON ★	UNICOM
132.85	128.35 360.65	123.05 (CTAF) 0

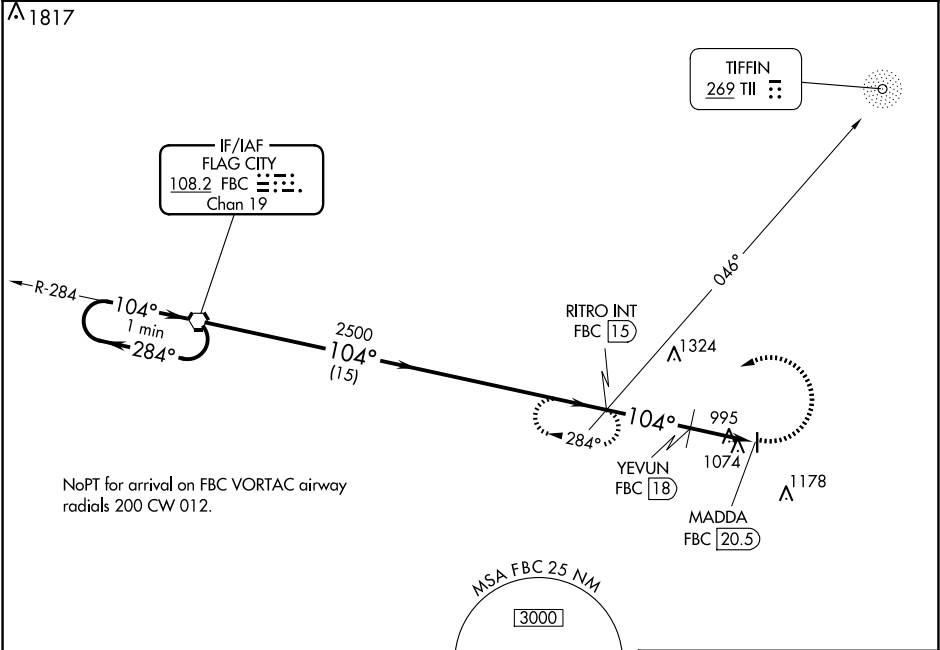

ADF or DME REQUIRED

ELEV 830

81

3997 X 75

36

One Minute Holding Pattern					2500 FBC R-104		RITRO INT					
2500 ←284° 104°→ FBC VORTAC 104°→ 2500 ←104° 1520 ←104° MADDA FBC 20.5 15 NM 3 NM 2.5					2500 FBC R-104		RITRO INT					
CATEGORY					A		B		C		D	
CIRCLING					1520-1 690 (700-1)		1520-1¼ 690 (700-1¼)		1540-2 710 (800-2)		1540-2¼ 710 (800-2¼)	
YEVUN FIX MINIMUMS (DME REQUIRED)					1420-1 590 (600-1)		1440-1 610 (700-1)		1540-2 710 (800-2)		1540-2¼ 710 (800-2¼)	
CIRCLING					1420-1 590 (600-1)		1440-1 610 (700-1)		1540-2 710 (800-2)		1540-2¼ 710 (800-2¼)	
IURL Rwy 18-36 0					Knots		60		90		120 150 180	
Min:Sec					5:30		3:40		2:45		2:12 1:50	