

|                                        |                        |                             |                                          |
|----------------------------------------|------------------------|-----------------------------|------------------------------------------|
| WAAS<br>CH <b>63114</b><br><b>W18A</b> | APP CRS<br><b>180°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5001</b><br><b>978</b><br><b>1003</b> |
|----------------------------------------|------------------------|-----------------------------|------------------------------------------|

RNAV (GPS) RWY 18


CENTRAL KENTUCKY RGNL (RGA)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1295 feet, LNAV/VNAV DA to 1341 feet and all MDA 80 feet; increase LPV all Cats visibility ¼ mile; LNAV/VNAV all Cats and LNAV Cats C and D ¼ mile and Circling visibility Cat C ½ mile, Cat D ¼ mile. VDP and Baro-VNAV NA when using Lexington altimeter setting.

MISSED APPROACH:  
Climb to 3100 direct ANETT and hold.

|                          |                                          |                                   |
|--------------------------|------------------------------------------|-----------------------------------|
| AWOS-3<br><b>119.625</b> | LEXINGTON APP CON<br><b>120.15 259.3</b> | UNICOM<br><b>122.725 (CTAF) ①</b> |
|--------------------------|------------------------------------------|-----------------------------------|

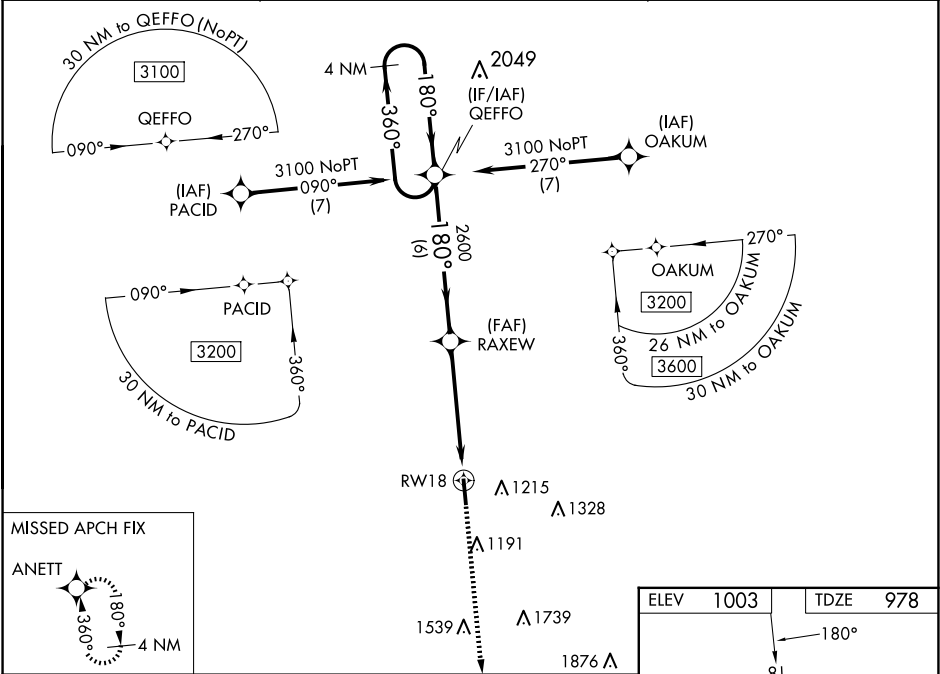


MISSED APCH FIX

ANETT

180°

360°

4 NM

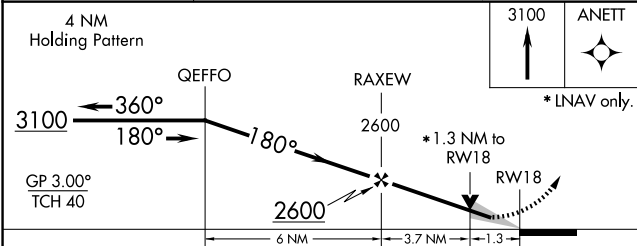

| CATEGORY     | A                     | B                     | C                       | D                       |
|--------------|-----------------------|-----------------------|-------------------------|-------------------------|
| LPV DA       |                       | 1228-7/8              | 250 (300-7/8)           |                         |
| LNAV/VNAV DA |                       | 1274-1                | 296 (300-1)             |                         |
| LNAV MDA     | 1440-1                | 462 (500-1)           | 1440-13/8               | 462 (500-13/8)          |
| CIRCLING     | 1440-1<br>437 (500-1) | 1520-1<br>517 (600-1) | 1520-1½<br>517 (600-1½) | 1780-2½<br>777 (800-2½) |

