


WAAS CH 61038 W05A	APP CRS 053°	Rwy Idg TDZE 270 Apt Elev 273
--	------------------------	---


RNAV (GPS) RWY 5

SANDERSON FLD (SHN)

RNP APCH - GPS.		MISSED APPROACH: Climb to 3000 direct CARRO and hold.
▼ ▲ Circling NA for Cats C and D south of Rwy 5-23. Rwy 5 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use OLM altimeter setting: increase all MDAs 60 feet and increase LNAV visibility Cats C and D ¼ SM; increase Circling visibility Cat C ¼ SM.		
ASOS 119.275	SEATTLE APP CON 121.1 290.9	UNICOM 122.8 (CTAF) 0

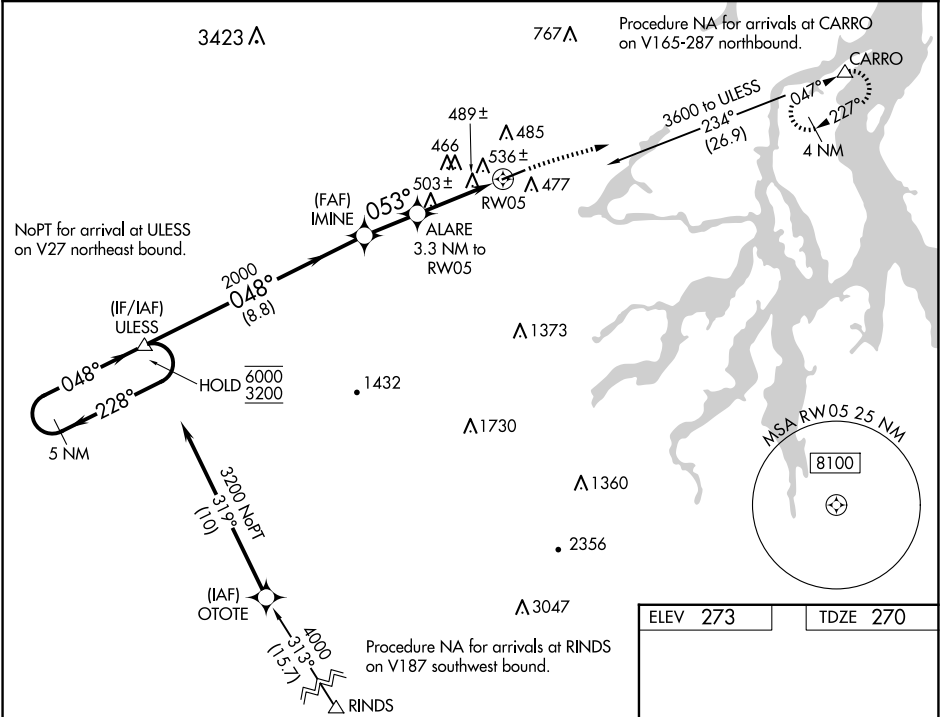

Visual Segment - Obstacles.				
5 NM Holding Pattern		ULESS	IMINE	ALARE 3.3 NM to RW05
6000	3200	2000	1340	RW05
228°		048°	048°	053°
8.8 NM		2 NM	3.3 NM	
CATEGORY	A	B	C	D
IP MDA	740-1	470 (500-1)	740-1⅓	470 (500-1⅓)
LNAV MDA	800-1	530 (600-1)	800-1½	530 (600-1½)
CIRCLING	840-1 567 (600-1)	860-1 587 (600-1)	860-1½ 587 (600-1½)	1200-3 927 (1000-3)

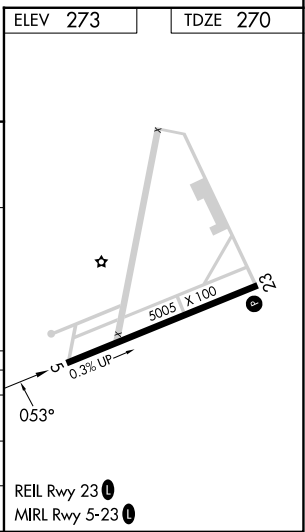

NW-1, 12 JUN 2025 to 10 JUL 2025

NW-1, 12 JUN 2025 to 10 JUL 2025