

LOM JV <u>331</u>	APP CRS 182°	Rwy Ldg 7000 TDZE 476 Apt Elev 476
-----------------------------	------------------------	---

NDB RWY 18
CLARK RGNL (JVY)




RADAR required for procedure entry.

V Circling NA for Cat D southwest of Rwy 14 and 36. Circling Rwy 14, 32 NA at night. For inop ALS, increase S-18 Cats A and B visibility to 1 SM and Cats C and D to 1/2 SM. When local altimeter setting not received, use Louisville Muhammad Ali Intl altimeter setting and increase all MDAs 40 feet and Circling visibility Cat C 1/2 SM. For inop ALS when using Louisville Muhammad Ali Intl altimeter setting, increase S-18 Cats A and B visibility to 1 SM.

MALSR
A5

MISSED APPROACH: Climb to 1500 then climbing left turn to 2500 direct CATCH LOM and hold.

AWOS-3 118,575	LOUISVILLE APP CON 132,075 327,0	CLNC DEL 118.05	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------	---------------------------------

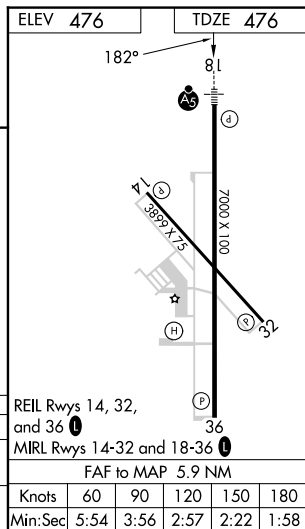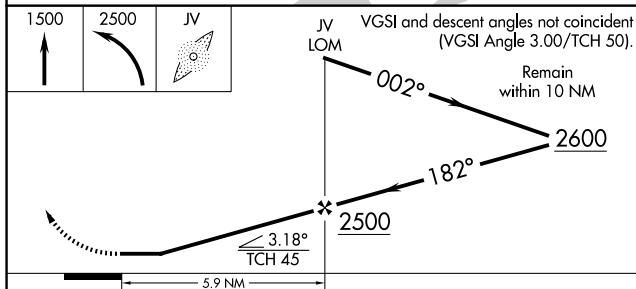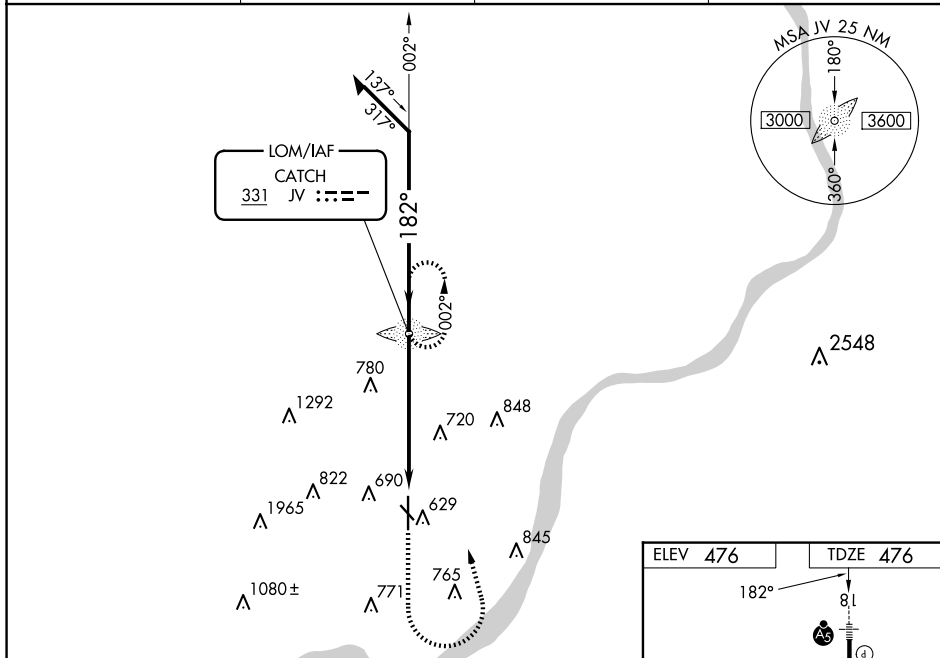

CATEGORY	A	B	C	D
S-18	1080- ³ / ₄	604 (700- ³ / ₄)	1080-1 ³ / ₈	604 (700-1 ³ / ₈)
C CIRCLING	1080-1	604 (700-1)	1080-1 ³ / ₄ 604 (700-1 ³ / ₄)	1100-2 624 (700-2)