
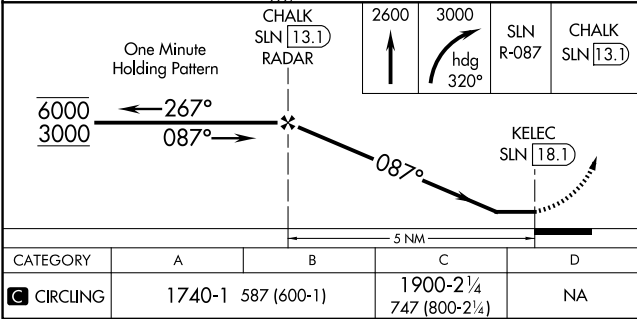


VORTAC SLN 117.1 Chan 118	APP CRS 087°	Rwy Ldg TDZE Apt Elev N/A N/A 1153
---	------------------------	--

VOR-A
ABILENE MUNI (K78)

DME required. RADAR required for procedure entry at CHALK.	MISSED APPROACH: Climb to 2600 then climbing right turn to 3000 on heading 320° and SLN VORTAC R-087 to CHALK/13.1 DME/RADAR and hold.
NA When local altimeter setting not received, use SLN altimeter setting and increase all MDAs 80 feet and visibility Cat C ¼ SM.	

AWOS-3P 124.125	MARSHALL AAF GCA* 121.25 269.05	UNICOM 122.8 (CTAF) 0
---------------------------	---	--

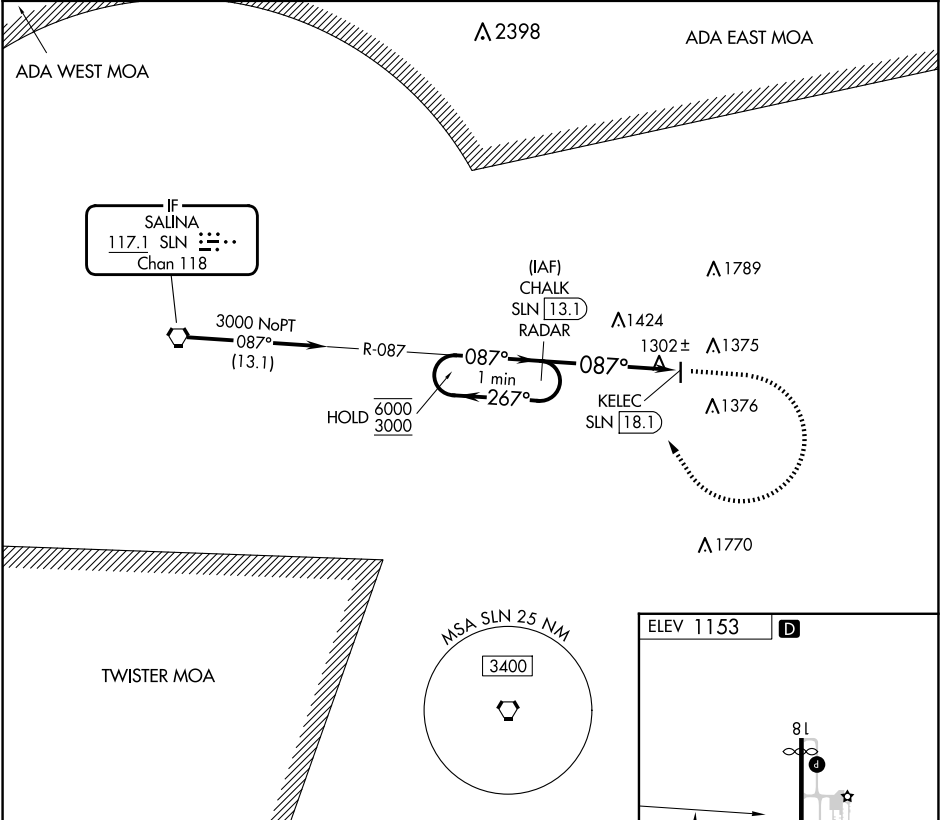

CATEGORY	A	B	C	D
CIRCLING	1740-1 587 (600-1)	1900-2¼ 747 (800-2¼)	NA	

REIL Rwy 18 and 36 **0**
MRL Rwy 18-36 **0**