

WAAS CH 78022 W05B	APP CRS 052°	Rwy Ldg 11004 TDZE 744 Apt Elev 744
--	------------------------	--

RNAV (GPS) RWY 5L

RICKENBACKER INTL (LCK)


RNP APCH - GPS.

A Circling NA northwest of Rwy 5L-23R. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV NA when using John Glenn Columbus Intl altimeter setting. When local altimeter setting not received, use John Glenn Columbus Intl altimeter setting: increase LPV DA to 979 feet; increase LNAV/VNAV DA to 1042 feet; increase all MDA's 40 feet and Circling visibility Cat D ¼ SM.



MALSR

MISSED APPROACH:
Climb to 1500 then
climbing right turn to
3000 direct XUB VOR
and hold.

ATIS 132.75	COLUMBUS APP CON 134.0 279.6	RICK TOWER 120.05 348.4	GND CON 125.275 275.8	CLNC DEL 125.275 275.8
----------------	---------------------------------	----------------------------	--------------------------	---------------------------

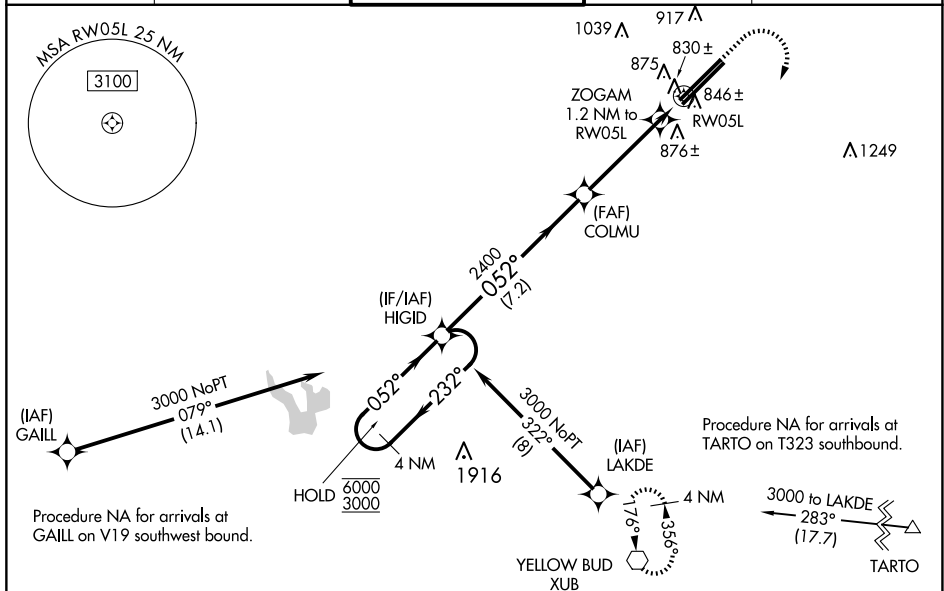

ELEV 744	D	TDZE 744
----------	----------	----------

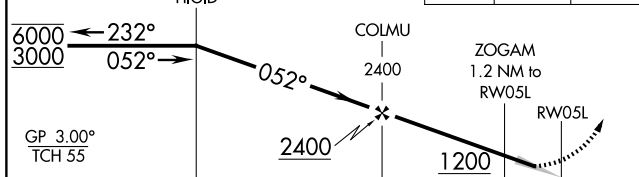

CATEGORY		A		B		C		D	
LPV	DA	944-½		200 (200-½)					
LNNAV/ VNAV	DA	1007-½		263 (300-½)					
LNNAV	MDA	1100-½	356 (400-½)	1100-⅝		356 (400-⅝)			
CIRCLING		1240-1	496 (500-1)	1280-1½ 536 (600-1½)		1400-2 656 (700-2)			

