

WAAS CH 99610 W33A	APP CRS 326°	Rwy Idg 5001 TDZE 10 Apt Elev 10
--	------------------------	---


RNAV (GPS) RWY 33
SOUTHLAND FLD (UXL)

RNP APCH-GPS.


T Baro-VNAV NA when using Lake Charles Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 49°C. Rwy 33 helicopter visibility reduction below $\frac{1}{2}$ SM NA. When local altimeter setting not received, use Lake Charles Rgnl altimeter setting and increase LPV DA to 367 feet; increase LNAV/VNAV DA to 403 feet and all visibilities $\frac{1}{4}$ SM: increase all MDAs 20 feet and Circling visibility C/D $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 2500 direct HICHY and via 253° track to OFERS and hold.

AWOS-3PT 118.175	LAKE CHARLES APP CON ★ 119.35 282.3	UNICOM 122.8 (CTAF) ①
----------------------------	---	---------------------------------

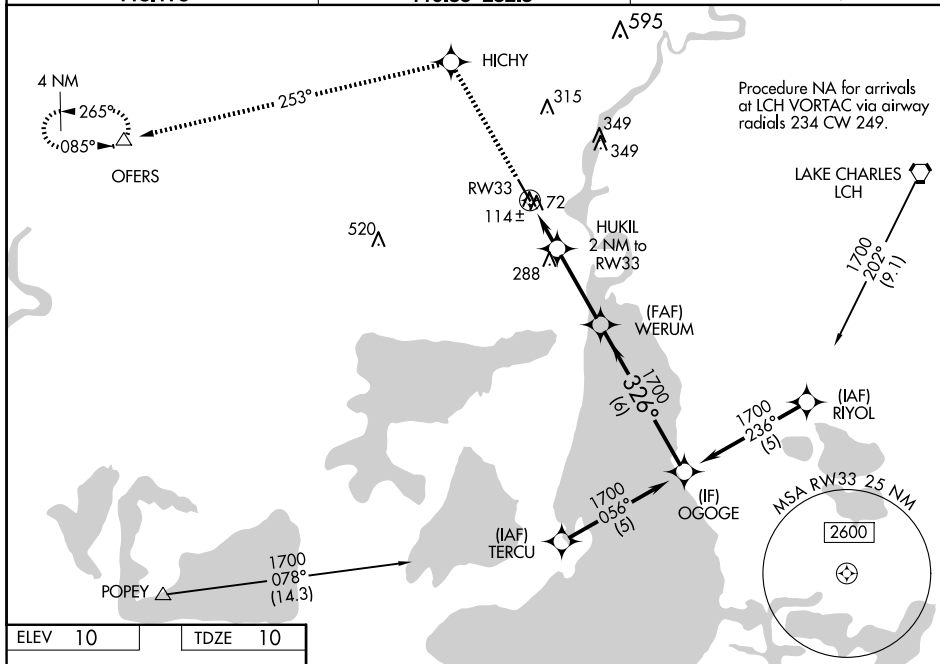

ELEV	10		TDZE	10
------	----	--	------	----

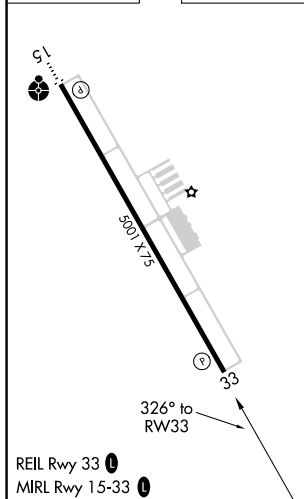

***LNAV only**

CATEGORY	A	B	C	D
LPV DA		348-1 $\frac{1}{4}$	338 (400-1 $\frac{1}{4}$)	
LNNAV/VNAV		384-1 $\frac{1}{4}$	374 (400-1 $\frac{1}{4}$)	
LNNAV MDA	380-1 370 (400-1)			380-1 $\frac{1}{4}$ 370 (400-1 $\frac{1}{4}$)
CIRCLING	420-1 410 (500-1)	520-1 510 (600-1)	680-1 $\frac{3}{4}$ 670 (700-1 $\frac{3}{4}$)	680-2 670 (700-2)

RNAV (GPS) RWY 33