


VORTAC CWK	APP CRS	Rwy Idg	4000
112.8	194°	TDZE	600
Chan 75		Apt Elev	600

VOR RWY 17
TAYLOR MUNI (T74)

DME required. Circling Rwy 35 NA at night. Rwy 17 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Austin Exec altimeter setting and increase all MDA 40 feet. VDP NA when using Austin Exec altimeter setting.		MISSED APPROACH: Climbing right turn to 2500 on CWK VORTAC R-014 to ESDEF/17.6 DME and hold.
AWOS-3PT 119.75	AUSTIN APP CON 127.225 317.65	UNICOM 122.8 (CTAF)

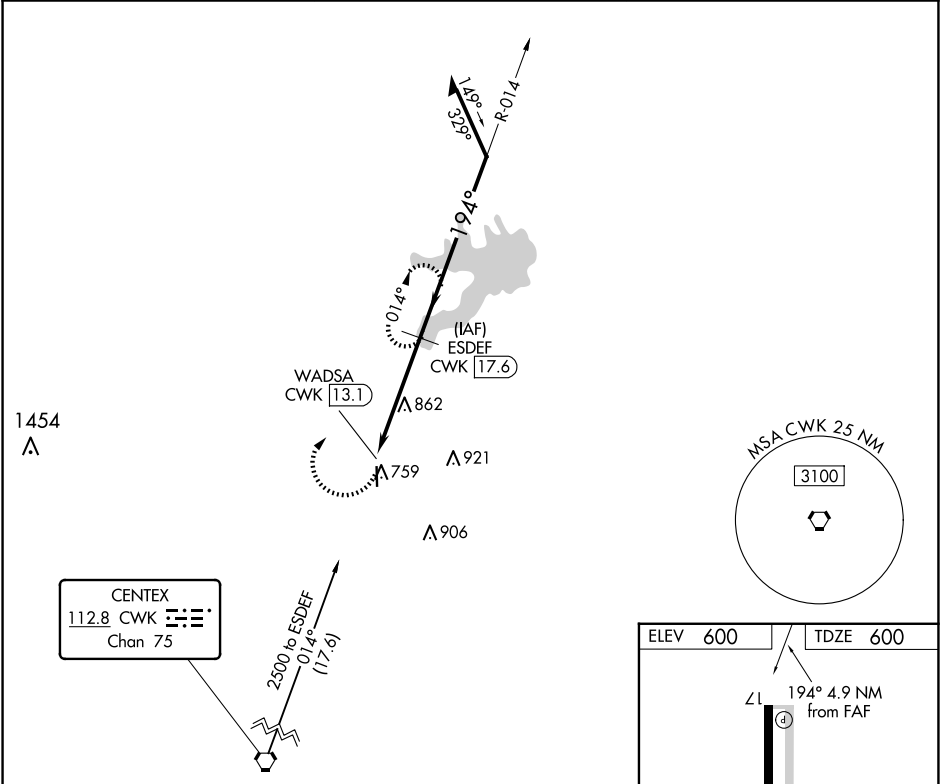

2500	ESDEF CWK 17.6	ESDEF CWK 17.6	Remain within 10 NM
CWK R-014	WADSA CWK 13.1	CWK 14.4	2500
	0.3	1.4	3.2 NM
CATEGORY	A	B	C D
S-17	1180-1	580 (600-1)	NA
CIRCLING	1180-1	580 (600-1)	NA

