

WAAS CH 58244 W36A	APP CRS 360°	Rwy Idg TDZE Apt Elev	6001 1301 1316
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 36
MONETT RGNL (HFJ)

RNP APCH - GPS.

⚠ Baro-VNAV and VDP NA when using Joplin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Joplin altimeter setting: increase LPV DA to 1613 feet; increase LNAV/VNAV DA to 1862 feet and all visibilities $\frac{3}{8}$ SM; increase all MDAs 120 feet and LNAV visibility Cuts C and D $\frac{3}{8}$ SM, and Circling visibility Cut C/D $\frac{1}{2}$ SM.



MALSR




MISSED APPROACH:
Climb to 3000 direct
PHENM and hold.

AWOS-3 118.275	SPRINGFIELD APP CON 124.95 318.2	CLNC DEL 121.85	UNICOM 123.075 (CTAF) 0
--------------------------	--	---------------------------	-----------------------------------

MISSED APCH FIX

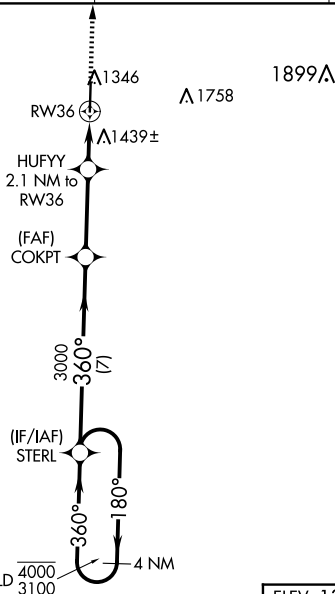

ELEV 1316	TDZE 1301
HIRL Rwy 18-36 L	
REIL Rwy 18 L	

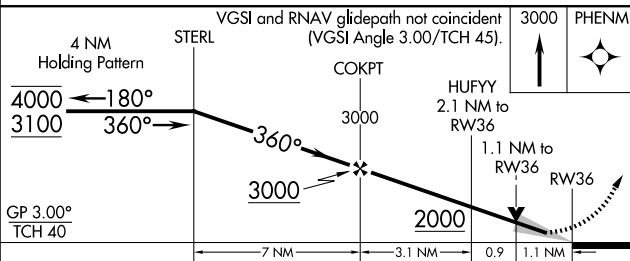

CATEGORY		A	B	C	D
LPV	DA	1501-½ 200 (200-½)			
LNAV/ VNAV	DA	1750-⅞ 449 (500-⅞)			
LNAV	MDA	1700-½ 399 (400-½)		1700-⅝ 399 (400-⅝)	
 CIRCLING		1760-1 444 (500-1)	1900-1 584 (600-1)	1900-1½ 584 (600-1½)	2060-2½ 744 (800-2½)

