

WAAS CH 82518 W35A	APP CRS 354°	Rwy Idg TDZE Apt Elev	3898 822 825
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

HUTSON FLD (GAF')

RNP APCH - GPS.


▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C .
When local altimeter setting not received, use Grand Forks Intl altimeter setting: increase LPV DA to 1141 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1268 feet and all visibilities ¼ SM; increase all MDA's 80 feet and visibility circling Cat C ¼ SM. Baro-VNAV NA when using Grand Forks Intl altimeter setting.
Circling NA to Rwy's 8 and 26.

MISSED APPROACH: Climb to 4000 direct OHUTO and hold, continue climb-in-hold to 4000.

AWOS-3 118.625	GRAND FORKS APP CON ★ 118.1 318.1	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

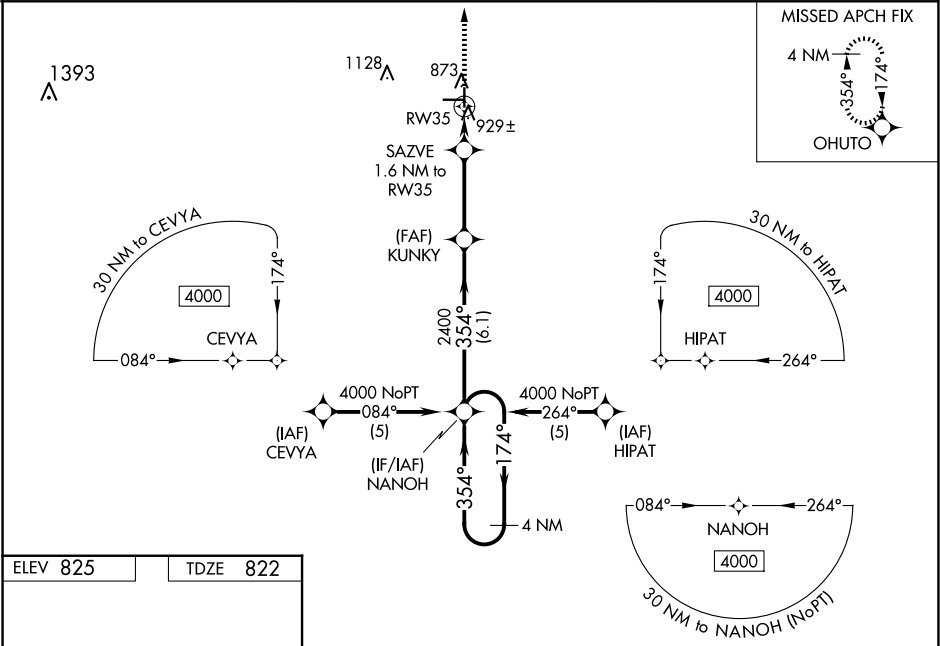

ELEV 825		TDZE 822	
MIRL Rwy 17-35 0		354°	
4000		OHUTO	
*LNAV only.		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).	
SAZVE 1.6 NM to RW35		KUNKY 2400	
RW35		NANOH	
1.6 NM		3.2 NM	
3.2 NM		6.1 NM	
*1360		2400	
174°		354°	
4000		4000	
GP 3.00°		TCH 40	
CATEGORY	A	B	C
LPV DA	1072-1	250 (300-1)	NA
LNAV/VNAV DA	1199-1¼	377 (400-1¼)	NA
LNAV MDA	1180-1	358 (400-1)	NA
CIRCLING	1340-1	515 (600-1)	1440-1¾ 615 (700-1¾)