


APP CRS	Rwy Idg	12000
173°	TDZE	5339
	Apt Elev	5434



RNAV (RNP) Z RWY 17L
DENVER INTL (DEN)

▼ GPS required. For inoperative MALS, increase RNP 0.10 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000. Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -25°C (-13°F) or above 48°C (118°F).	MALS 	MISSED APPROACH: Climb to 5900 then climbing left turn to 10000 direct LIMEX and hold.
---	--	---

D-ATIS 125.6 379.9 (ARR) 134.025 (DEP)	DENVER APP CON 119.3 307.3 (N) 120.35 379.3 (S)	DENVER TOWER 132.35 239.275	GND CON 121.35 379.175 (W) 121.85 377.1 (E)	CINC DEL 118.75	CPDLC
--	---	--------------------------------	---	--------------------	-------

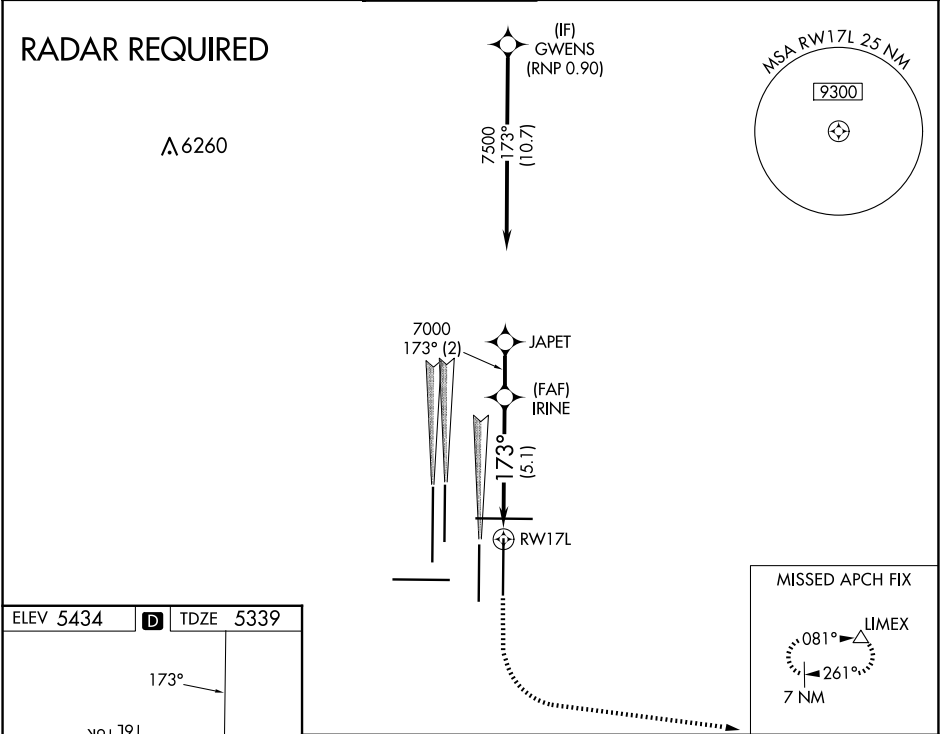

ELEV 5434	D	TDZE 5339
-----------	----------	-----------

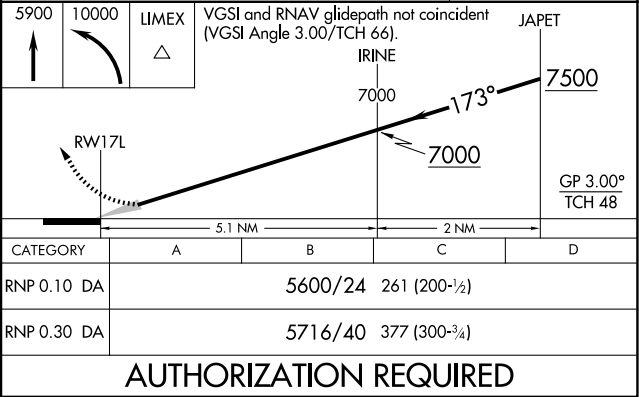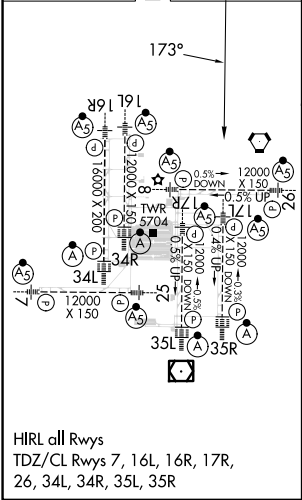

SW-1, 12 JUN 2025 to 10 JUL 2025

SW-1, 12 JUN 2025 to 10 JUL 2025