

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>90526</b><br><b>W21A</b> | APP CRS<br><b>207°</b> | Rwy Idg<br>TDZE <b>537</b><br>Apt Elev <b>537</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 21



OHIO COUNTY (JQD)

RNP APCH - GPS.


**⚠** Baro-VNAV NA when using Owensboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Owensboro altimeter setting and increase LPV DA to 858 feet, increase LNAV/VNAV DA to 1082 feet. Increase all MDA 80 feet, increase LNAV/VNAV visibilities all Cats ¼ SM, increase LNAV and Circling Cat C visibility ¼ SM. Rwy 21 helicopter visibility reduction below 1 SM NA. Procedure NA at night.

**MISSED APPROACH:**  
Climb to 3000 direct VUSWO and on track 273° to CCT DME and hold.

|                          |                                              |                                 |
|--------------------------|----------------------------------------------|---------------------------------|
| AWOS-3PT<br><b>132.1</b> | EVANSVILLE APP CON ★<br><b>124.025 290.9</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|----------------------------------------------|---------------------------------|

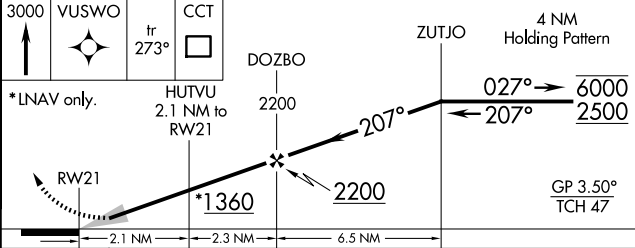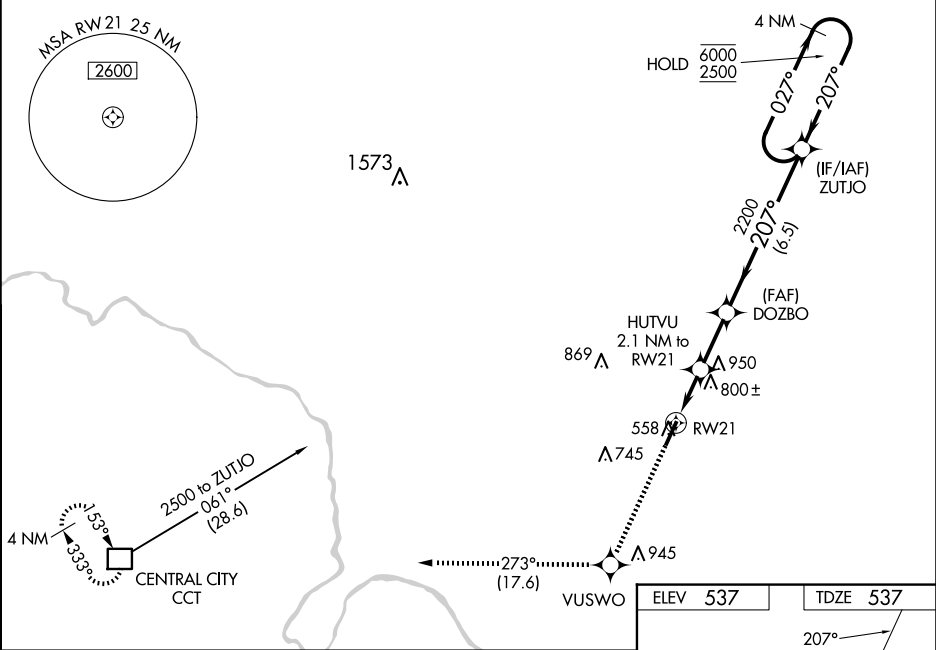

| CATEGORY     | A                          | B                  | C                          | D  |
|--------------|----------------------------|--------------------|----------------------------|----|
| LPV DA       | 787-1 250 (300-1)          |                    | 807-1 270 (300-1)          | NA |
| LNAV/VNAV DA | 1011-1 3/8 474 (500-1 3/8) |                    |                            | NA |
| LNAV MDA     | 1060-1 523 (600-1)         |                    | 1060-1 1/2 523 (600-1 1/2) | NA |
| CIRCLING     | 1060-1 523 (600-1)         | 1100-1 563 (600-1) | 1300-2 1/4 763 (800-2 1/4) | NA |

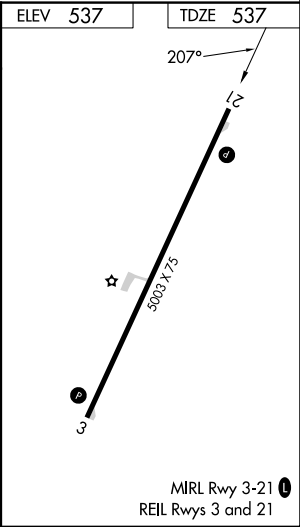

SE-1, 12 JUN 2025 to 10 JUL 2025

SE-1, 12 JUN 2025 to 10 JUL 2025