

WAAS

CH **56246**

W16A

APP CRS

159°

Rwy Idg

8800

TDZE

1287

Apt Elev

1288

RNAV (GPS) RWY 16L

NORTHWEST ARKANSAS NTL (XNA)

RNP APCH - GPS.

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1¼ SM and LNAV Cats C, D, and E visibility to 1½ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

AS


MISSED APPROACH:

Climb to 3400 direct LNDY and hold.

ATIS	RAZORBACK APP CON *	NORTHWEST ARKANSAS NTL TOWER *	GND CON
119.425	121.0 244.575	127.1 (CTAF) 0	121.9

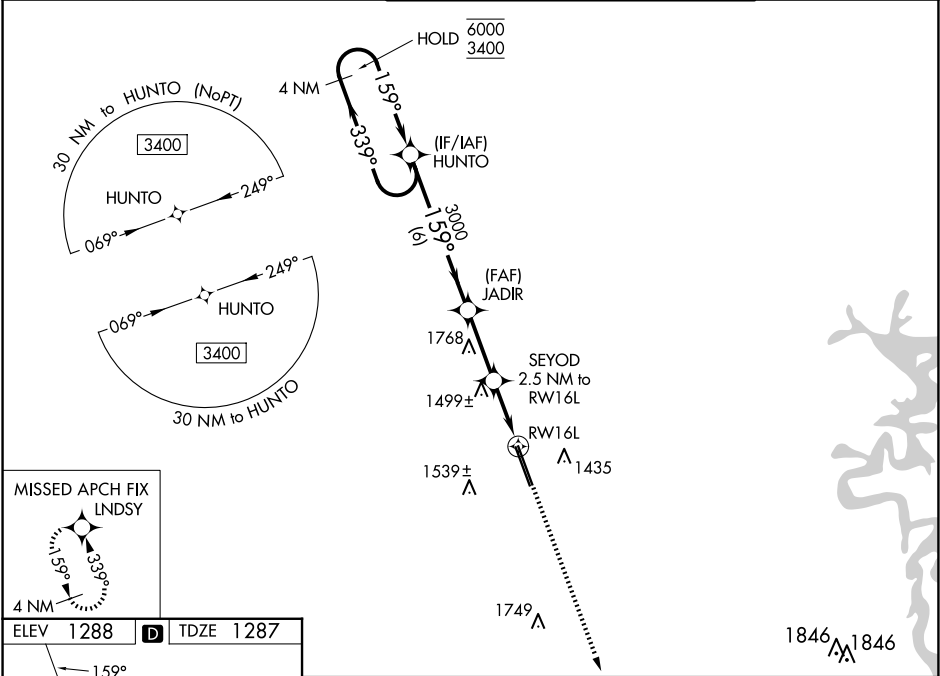

ELEV	1288	D	TDZE	1287
------	-------------	----------	------	-------------

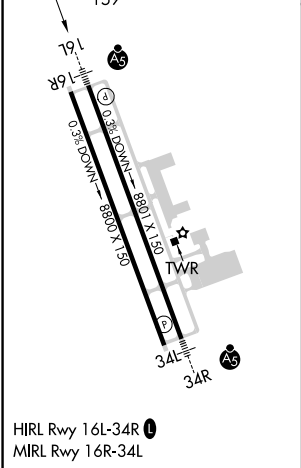

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).				3400 ↑	LNDY ✦
GP 3.00° TCH 57							
CATEGORY	A	B	C	D	E		
LPV DA*	1487/24 200 (200-½)						
LNAV/VNAV DA	1710/40 423 (500-¾)						
LNAV MDA	1760/24	473 (500-½)	1760/50 473 (500-1)				
CIRCLING	1760-1	472 (500-1)	2040-2¼ 752 (800-2¼)	2080-2½ 792 (800-2½)	2080-2¾ 792 (800-2¾)		