WAAS CH 99310 W18B	APP CRS 179°	Rwy ldg 5000 TDZE 55 Apt Elev 55

RNAV (GPS) Z RWY 18

PICAYUNE MUNI (MJD)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).
Baro-VNAV and VDP NA when using Stennis Intl altimeter setting. DME/DME RNP-0.3 NA.
Helicopter visibility reduction below ¾SM NA. Procedure NA when R-4403 B, C, or E is active.
When local altimeter setting not received, used Stennis Intl altimeter setting: increase LPV DA to 377 and visibility all Cats ⅛ mile; increase LNAV/VNAV DA to 621 and visibility all Cats ⅛ mile; increase all MDA 40 feet and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 1200, then climbing right turn to 1800 direct CIQYI and hold.

AWOS-3PT	GULFPORT APP CON★	UNICOM
119.075	124.6 354.1	122.8 (CTAF) L

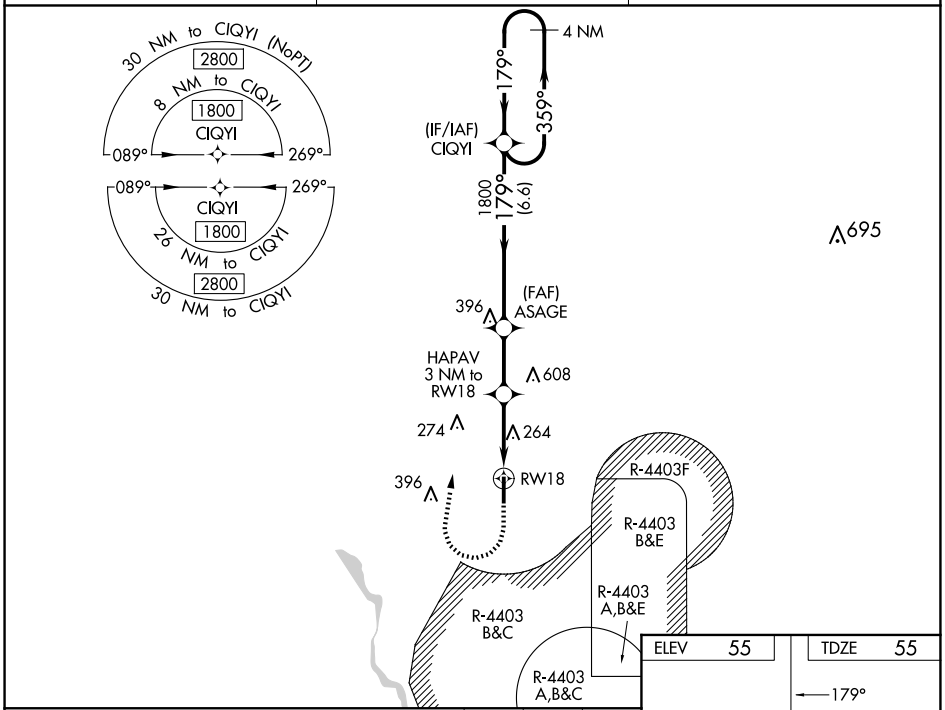

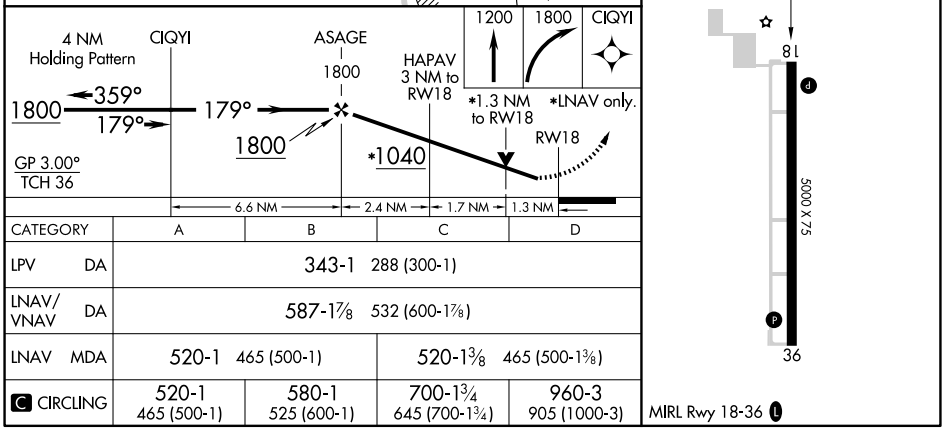

CATEGORY	A	B	C	D
LPV DA	343-1 288 (300-1)			
LNAV/VNAV DA	587-1⅞ 532 (600-1⅞)			
LNAV MDA	520-1 465 (500-1)		520-1⅜ 465 (500-1⅜)	
C CIRCLING	520-1 465 (500-1)	580-1 525 (600-1)	700-1¾ 645 (700-1¾)	960-3 905 (1000-3)

SC-4, 12 JUN 2025 to 10 JUL 2025
SC-4, 12 JUN 2025 to 10 JUL 2025