

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>77841</b><br><b>W16A</b> | APP CRS<br><b>155°</b> | Rwy Idg <b>3300</b><br>TDZE <b>386</b><br>Apt Elev <b>386</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 16

REEDLEY MUNI (O32)



⚠

⚠ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). Circling NA east of Rwy 16-34. Baro-VNAV and VDP NA when using Fresno Yosemite Intl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fresno Yosemite Intl altimeter setting: increase all DAs 41 feet and all visibilities ½ SM; increase all MDAs 60 feet.

MISSED APPROACH: Climb to 3100 direct DEICE and hold, continue climb-in-hold to 3100.

|                            |                                        |                                 |
|----------------------------|----------------------------------------|---------------------------------|
| AWOS-3PT<br><b>120.175</b> | FRESNO APP CON<br><b>132.35 323.25</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|----------------------------|----------------------------------------|---------------------------------|

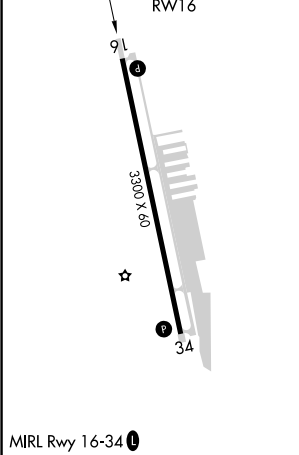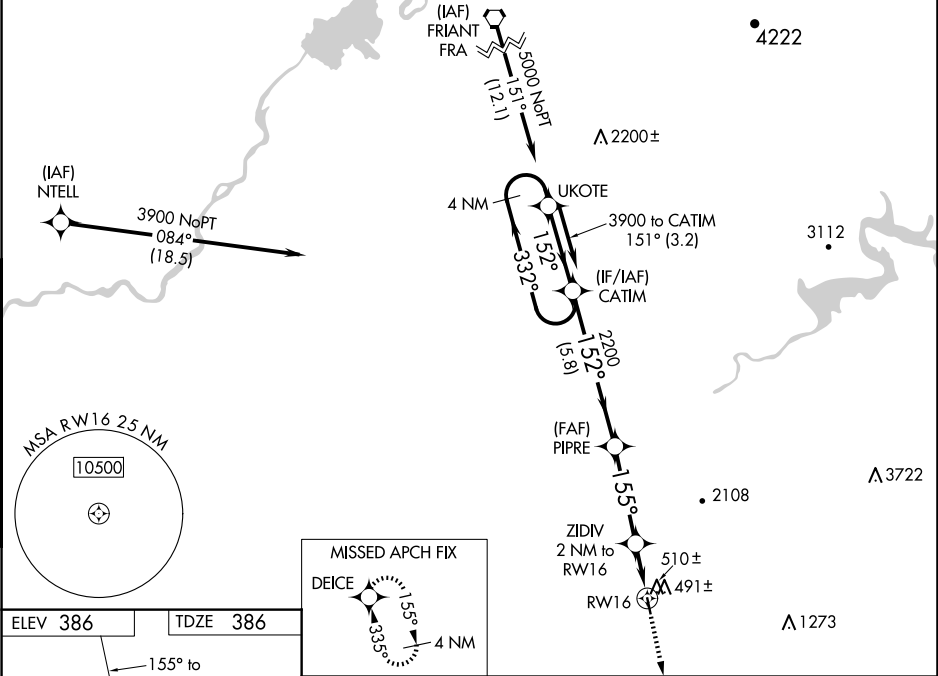

|                      |                      |                      |        |                       |                         |            |
|----------------------|----------------------|----------------------|--------|-----------------------|-------------------------|------------|
| 4 NM Holding Pattern |                      | CATIM                | PIPRE  | ZIDIV<br>2 NM to RW16 | 3100<br>↑<br>*LNAV only | DEICE<br>✦ |
| 3900                 | ←332°<br>152°→       |                      | 2200   | 152°<br>2200<br>*1060 | 155°                    |            |
| GP 3.00°<br>TCH 41   |                      | 5.8 NM               | 3.6 NM | 1 NM<br>*1 NM to RW16 | 1 NM<br>RW16            |            |
| CATEGORY             | A                    | B                    | C      | D                     |                         |            |
| LPV DA               | 636-3/4              | 250 (300-3/4)        | NA     |                       |                         |            |
| LNAV/<br>VNAV DA     | 672-7/8              | 286 (300-7/8)        | NA     |                       |                         |            |
| LNAV MDA             | 760-1                | 374 (400-1)          | NA     |                       |                         |            |
| CIRCLING             | 800-1<br>414 (500-1) | 840-1<br>454 (500-1) | NA     |                       |                         |            |