

APP CRS
198°

Rwy Idg
TDZE
Apt Elev

5000
717
718

RNAV (GPS) RWY 20

BILL PUGH FLD (M22)

RNP APCH-GPS.


▼

▲ NA

Use Muscle Shoals altimeter setting; when not received, use Decatur altimeter setting and increase all MDA 60 feet; increase LNAV Cat C/D visibility 1/8 SM and Circling Cat A visibility 1/4 SM. Procedure NA at night. Rwy 20 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climbing right turn to 3000
direct AYOTE and hold.

MSL ASOS 119.425	MEMPHIS CENTER 120.8 307.0	UNICOM 122.8 (CTAF) 0
----------------------------	--------------------------------------	---------------------------------

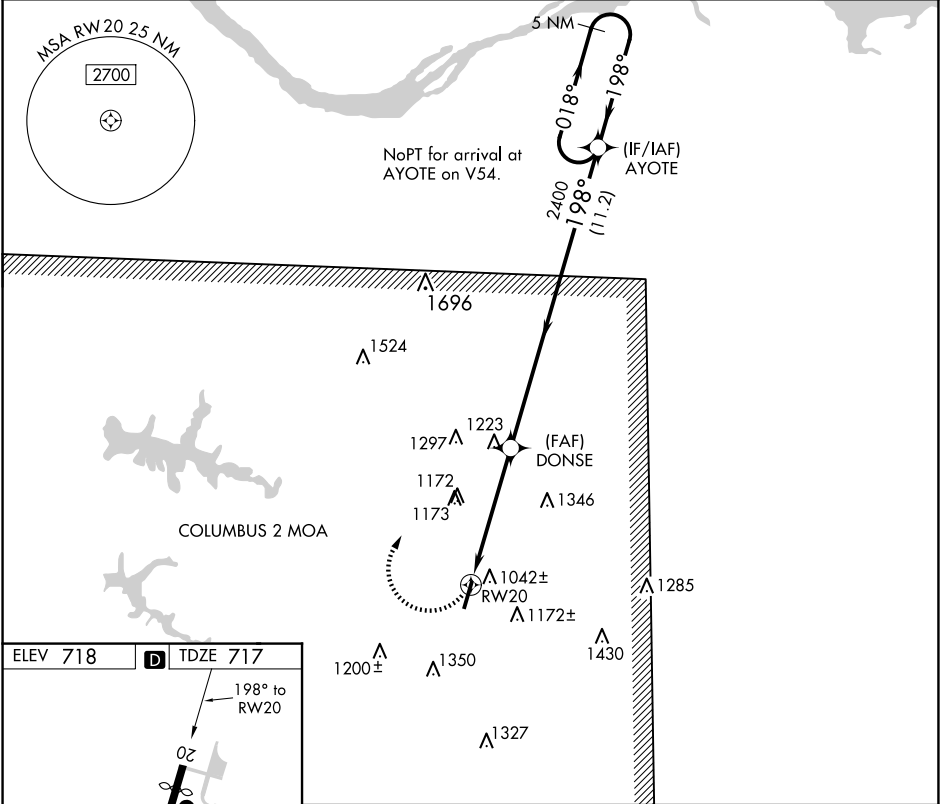

ELEV 718

D

TDZE 717

198° to RW20

20

5500 x 75

0.3% UP

2

3000

AYOTE

5 NM Holding Pattern

DONSE

RW20

3.04° TCH 40

2400

198°

018°

3000

5.1 NM

11.2 NM

CATEGORY	A	B	C	D
LNAV MDA	1360-1	643 (700-1)	1360-1 ⁷ / ₈	643 (700-1 ⁷ / ₈)
CIRCLING	1520-1 802 (900-1)	1540-1 ¹ / ₄ 822 (900-1 ¹ / ₄)	1720-3	1002 (1100-3)

MIRL Rwy 2-20

REIL Rwy 2 and 20