

WAAS
CH **86909**
W02A

APP CRS
026°

Rwy Ldg
TDZE **1028**
Apt Elev **1028**

RNAV (GPS) RWY 2

MOREHEAD-ROWAN COUNTY CLYDE A THOMAS RGNL (SYM)


T

A

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Mount Sterling altimeter setting. When local altimeter setting not received, use Mount Sterling altimeter setting: increase all DA 50 feet and all MDA 60 feet; increase LPV all Cats and LNAV Cats C/D visibility 1/8 mile, LNAV/VNAV all Cats visibility 1/4 mile, and Circling Cats C/D visibility 1/4 mile.

MISSED APPROACH:
Climb to 3600 direct IDABE and hold.

AWOS-3 119.95	INDIANAPOLIS CENTER 124.225 360.725	UNICOM 122.7 (CTAF) 0
-------------------------	---	---------------------------------

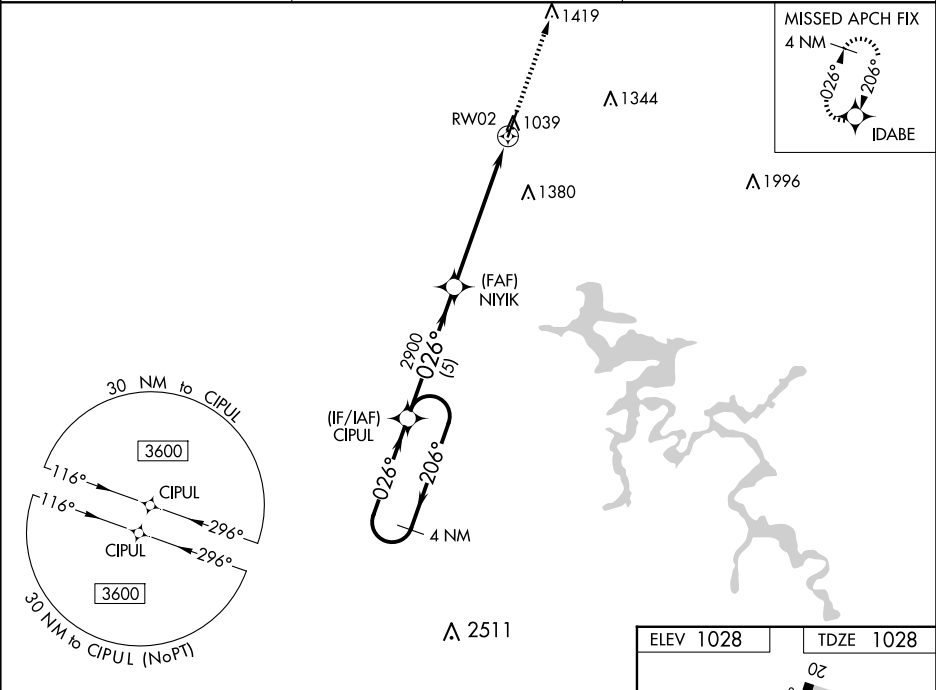

4 NM Holding Pattern		CIPUL		3600 IDABE	
3600 ← 206°		026° →		026°	
GP 3.00° TCH 40		2900		*1.4 NM to RW02	
5 NM		4.4 NM		1.4 NM	
CATEGORY	A	B	C	D	
LPV DA	1228-3/4		200 (200-3/4)		
LNAV/VNAV DA	1439-1 3/8		411 (500-1 3/8)		
LNAV MDA	1500-1	472 (500-1)	1500-1 3/8	472 (500-1 3/8)	
CIRCLING	1520-1	492 (500-1)	1760-2 732 (800-2)	1820-2 1/2 792 (800-2 1/2)	

ELEV 1028

TDZE 1028

5500 X 100

0.3% UP

026°

MIRL Rwys 2-20 0

REIL Rwys 2 and 20 0