

WAAS
CH **78313**
W24A

APP CRS
244°

Rwy Ldg
TDZE
Apt Elev
4000
55
55

RNAV (GPS) RWY 24

ROBERT/BOB/CURTIS MEML (D76) (PFNO)

RNP APCH.

▼

▲

❄

For uncompensated Baro-VNAV systems,
LNAV/VNAV NA below -20°C or above
54°C.


-22°C

MISSED APPROACH: Climb to 2700 direct ODMEE and hold,
continue climb-in-hold to 2700.

AWOS-3P
120.0

ANCHORAGE CENTER
119.2 263.0

CTAF
122.7

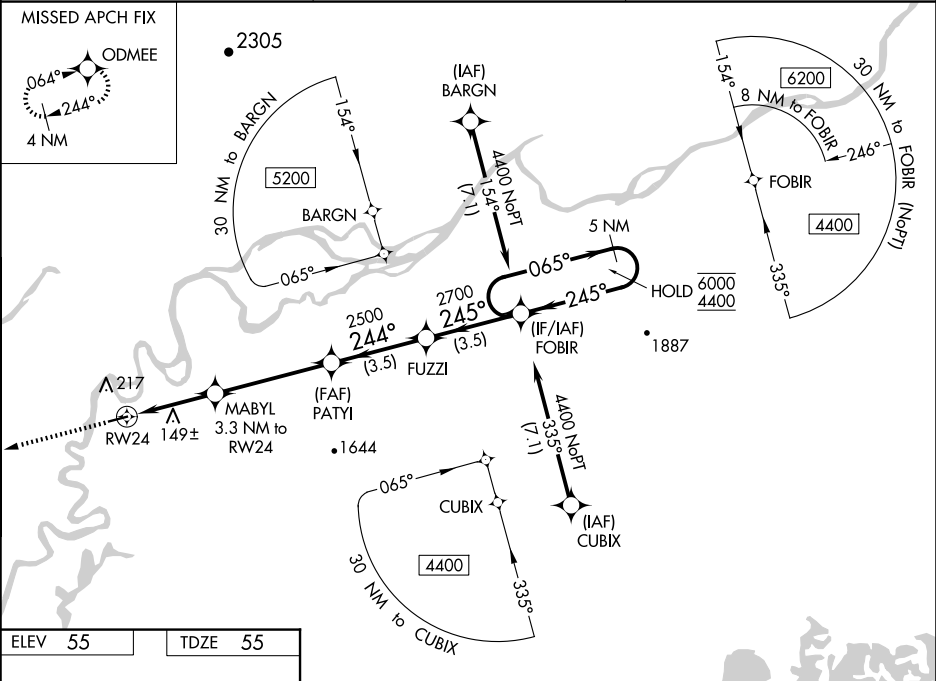

ELEV 55

TDZE 55

2700 ODMEE

*LNAV only

MABYL 3.3 NM to RW24

*1.2 NM to RW24

RW24

1120*

2500

2700

244°

245°

245°

FOBIR 5 NM Holding Pattern

065° → 6000

← 245° 4400

GP 3.00°

TCH 40

CATEGORY	A	B	C	D
LPV DA	305-1	250 (300-1)		
LNAV/VNAV DA	355-1	300 (300-1)		
LNAV MDA	460-1	405 (500-1)	460-1½	405 (500-1½)
CIRCLING	520-1	465 (500-1)	520-1½	760-2¼
			465 (500-1½)	705 (800-2¼)

MIRL Rwy 6-24