

## KNIK THREE DEPARTURE

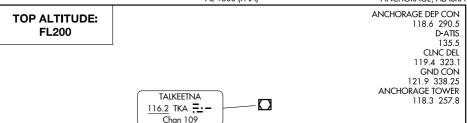



NOTE: RADAR required.

∧ NODLE

13700

NOTE: Aircraft cleared via NODLE FIX cross at or above 13700 for terrain.

## TAKEOFF MINIMUMS

Rwys 15, 25L/R, 33: NA-ATC.

Rwy 7L: Standard with minimum climb of 253' per NM to 400. Rwy 7R: Standard with minimum climb of 285' per NM to 400.

NOTE: Chart not to scale.

## V

Ŗ,

12 JUN 2025

ਰ

07 AUG 2025

## DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 7L/R: Climb heading 072° to 2000 or TED 4 DME, whichever comes first, then climbing left turn heading 329° for vectors to assigned route or fix. Maintain FL200 or assigned altitude, expect filed altitude 10 minutes after departure.

All aircraft, climb as rapidly as practical through 3000, if unable to reach 2000 by TED 4 DME advise ATC prior to departure.

KNIK THREE DEPARTURE